





231 / 400 V - 50 Hz & 277 / 480 V - 60 Hz





GENERATOR GENERAL INFORMATION

GENERATOR	FREQUENCY	VOLTAGE	POWER FACTOR	SPEED	DIESEL E	NGINE		ALTERN	ATOR		TYPE OF	GENERA	TOR OUTP	UT
Model	Hz	V	Cos Q	Rpm	Brand	Model	Series	Brand	Model	Series	Operation	kVA	kW	А
							ADL			Standby	1.250,0	1.000,0	1.806,4	
JCN 1250	50	231/400	8.0	1500					BENERGY.	400MX 400S	Prime	1.136,4	909,1	1.642,1
					ICNI	A 1 F 4 F 1 C I	A.II				Continuous	795,5	636,4	1.149,5
					JCN	A1545JCI	All	9			Standby	1.250,0	1.000,0	1.806,4
JCN 1250	60	277/480	0.8	1800				ĘĞ,			Prime	1.136,4	909,1	1.642,1
											Continuous	795,5	636,4	1.149,5

- Diesel Engines with Advanced Technology and Quality
- Alternators with Advanced Technology and Quality
- Low Exhaust Emission
- Control Panel Suitable for Flexible Application
- Patented Compact Designed and Sound proof Canopy
- Low Operating Cost, Suitable for Heavy-Duty
- Durability, Low Noise Level

- Tropical 50 °C Radiator, First Class Product Support
- Fuel Filter with Water and Particle Separator
- Low Fuel Consumption, Low Oil Consumption
- Global Technical Service and Maintenance Support
- Wide Range of Affordable Spare Parts
- High Quality and Reliable Technology
- Half Century Experience in Generator Manufacturing

STAND BY POWER RATING - (ESP):

ESP is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Stand by Power rating. This rating should be applied where reliable utility power is available. A Stand By rated engine should be sized for a maximum of an 70% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Stand by Power rating. Stand By ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

PRIME POWER RATING - (PRP):

Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER (ULTP):

PRP (Prime Power) is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER (LTP):

LTP (Limited Time Prime Power) is available for a limited number of hours in a no variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation

CONTINUOUS POWER RATING (COP):

COP is the power that the engine can continue to use under the prescribed speed and the specified environment condition in the normal maintenance period stipulated in the manufacturing plant. And Continuous Power is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.



231 / 400 V - 50 Hz & 277 / 480 V - 60 Hz



PAY ATTENTION TO THE POINTS BELOW IN PICKING AND USING THE GENERATOR

- * Generators can work on Continuous Power at 70% of Prime power value if only all maintenances are done on time with original spare parts and high-quality oils that manufacturer advice.
- * Generators should not operate below 50% of Prime Power value. In such a case, the engine will burn excessive oil and eventually have irreparable damage.
- * If your need is 1000 kVA or above, you should prefer Synchronic Systems with 2-3 generators with failure back up and simultaneous aging.
- * These points will provide advantage for you with purchasing and operating the generator.


GENERATOR DIMENSIONS AND TECHNICAL DRAWINGS





VALUES		OPEN TYPE GENERATOR	CANOPY TYPE GENERATOR
WIDTH	mm	1800	2144
LENGTH	mm	4200	5916
HEIGHT	mm	2135	2759
WEIGHT (NET)	Kg	6470	9810
FUEL TANK CAPACITY	L	2000	2000

SYMBOL	OPEN	CANOPY	
L	4200	5916	
W	1800	2144	
Н	2135	2430	
S		329	
Α	500		
В	1510		
С	1700		
D1		1050	
D2		1044	
D3		1044	
D4			
D5			

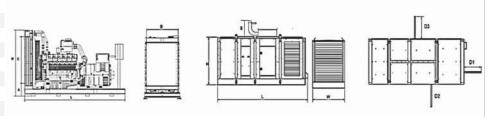

FUEL CONSUMPTION

PERCENT OF PRIME POWER	1500 rpm	1800 rpm
TENGENT OF THINKE FOWER	I/hr	I/hr
110 %	246,35	246,35
100 %	222,21	222,21
75 %	167,51	167,51
50 %	112,81	112,81



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



DIESEL ENGINE MAIN TECHNICAL PARAMETERS

GENERAL		
Number of Cylinders		12
Configuration		V-Type
Aspiration		Turbocharged & Intercooled
Combustion System		Direct Injection
Compression Ratio		15.5:1
Bore	mm	145
Stroke	mm	155
Displacement	L	32,7
Governing Type	-	Electronic
Governing Class		G3
Rotation		Counterclockwise
Firing Order		1-12-5-8-3-10-6-7-2-11-4-9
Emission		Tier II
Moments of Rotation Inertia		HCI II
Engine	Kg - m²	24,19
Flywheel	Kg - m²	15,38
Performance Rating	Kg - III	13,36
Speed Droop	%	≤1
Steady State Speed Band	%	≤0,5
FILTERS	/6	2,02
Air Filter		Dry Type, Replaceable
Fuel Filter		With Water Separator
Oil Filter		Element Type, Particulate Trap
FLYWHEEL HOUSING AND FLEX COUPLING		Liement Type, Farticulate Trap
Flywheel Housing	SAE (J620)	1
Flex Coupling Disc	Inch (")	14
TEST CONDITIONS	men ()	14
Ambient Temperature	%	25
Atmospheric Pressure	KPa	100
Relative Humidity	Rh (%)	30
Max. Operating Intake Resistance	KPa	<6,2
Exhaust Backpressure Limit	KPa	<6
Fuel Temperature (Fuel Inlet Pump)	°C	38±2
OVERALL DIMENSIONS	- C	50_2
Length*	mm	2330
Width	mm	1760
Height Dry Weight	mm	2135 2950
Dry Weight *From front end of radiator to near end of air filter	kg	2330
FAN		
Diameter	mm	1310
Drive Ratio		1,04:1
Number of Blades		6 Matal
Material Type		Metal Blowing
Type		DIOMILIE



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



DIESEL ENGINE MAIN TECHNICAL PARAMETERS

COOLING SYSTEM			
Radiator Type	50ºC	Tropical	
Total Coolant Capacity	L	220	
Max. Perm. Coolant Outlet Temperature	ōС	105	
Max. Perm. Flow Resist. (Cool. System And Piping)	bar	0,5	
Max. Temperature of Coolant Warning	ōC	95	
Max. Temperature of Coolant Shutdown	ōC	98	
Thermostat Operation Temperature - Initial Open	ōC	66	
Thermostat Operation Temperature - Full Open	ōC	78	
Delivery of Coolant Pump	m³/h	14,50	
Min. Pressure Before Coolant Pump	bar	0,5	
Radiator Face Area	m²	2,56	
Rows	Row	7	
Matrix Density	Per / Inch	18	
Material		Aluminum	
Width of Matrix	mm	1510	
Height of Matrix	mm	1700	
Pressure Cap Setting	kPa	90	
Estimated Cooling Air Flow Reserve	kPa	0,125	
Engine Pre Heater-Tube (with Circulation Pump)	W	6600	
LUBRICATION SYSTEM			
Total System	L	90	
Minimum Oil Level	L	85	
Nominal Motor Operating Temperature	ōС	40	
Lubricating Oil Pressure (Rated Speed)	bar	7	
Relief Valve Opens	kPa	200	
Oil / Fuel Consumption Ratio	%	≤0,48	
Normal Oil Temperature	ōC	110	
ELECTRICAL SYSTEM			
Voltage	V	24	
Starter	kW	13	
Alternator Output Ampers	А	60	
Alternator Output Voltage	V	28	
Batteries Capacity	Ah	2X200	



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



JCB ENERGY DIESEL ENGINE POWER RATINGS

ENGINE MODEL	A1545JCI		ENGINE FAMILY	JC46	ENGINE SERIES	All	
		TYPICAL GENER	ATOR OUTPUT (NET)	ENGINE POWE	₹		
Speed (Rpm)	Type of Operation			Gr	OSS	Net	
		kVA	kWe	KWm	Нр	kWm	Нр
1500	Stand By(Maximum)	1.250,0	1.000,0	1.070,0	1.436,2	1.047,0	1.405,4
	Prime	1.136,0	909,0	975,0	1.308,7	952,0	1.277,9
1800	Stand By(Maximum)	1.250,0	1.000,0	1.070,0	1.436,2	1.047,0	1.405,4
	Prime	1.136,0	909,0	975,0	1.308,7	952,0	1.277,9

DIESEL ENGINE MATCHING PARAMETERS - 50 HZ

50 HZ @ 1500 R/MIN		STAND BY	PRIME
Gross Engine Power	kW	1070,0	975,0
Net Engine Power	kW	1047,0	952,0
Fan Power Consumption (Belt Pulley Driven)	kW	20,0	20,0
Other Power Loss	kW	3,0	3,0
Mean Effective Pressure	MPa	2,62	2,39
Intake Air Flow	m³/min	85,75	81,67
Exhaust Temperature Limit	ōС	650	650
Exhaust Flow	m ³/ min	189,00	180,00
Boost Pressure Ratio		3,40	3,50
Mean Piston Speed	m / s	8,3	8,3
Cooling Fan Air Flow	m ³/ min	1083,0	1083,0
Typical Generator Output Power	kVA	1250	1136
HEAT REJECTION		STAND BY	PRIME
Energy in Fuel (Heat of Combustion)	kW	2675,0	2438,0
Gross Heat to Power	kW	1070,0	975,0
Energy to Coolant and Lubricating Oil	kW	455,0	414,0
Heat Dissipation Capacity *	kW	187,0	171,0
Energy to Exhaust	kW	776,0	707,0
Heat to Radiation	kW	80,0	73,0

^{*}Intake Intercooled system



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



DIESEL ENGINE MATCHING PARAMETERS - 60 HZ

60 HZ @ 1800 R/MIN		STAND BY	PRIME
Gross Engine Power	kW	1070,0	975,0
Net Engine Power	kW	1047,1	952,0
Fan Power Consumption (Belt Pulley Driven)	kW	20,0	20,0
Other Power Loss	kW	3,0	3,0
Mean Effective Pressure	MPa	2,40	1,99
Intake Air Flow	m ³ / min	94,33	81,67
Exhaust Temperature Limit	ōС	650	650
Exhaust Flow	m³/min	207,90	180,00
Boost Pressure Ratio		3,70	3,50
Mean Piston Speed	m / s	9,9	9,9
Cooling Fan Air Flow	m ³ / min	1191,0	1191,0
Typical Generator Output Power	kVA	1250	1136
HEAT REJECTION		STAND BY	PRIME
Energy in Fuel (Heat of Combustion)	kW	2821,0	2572,0
Gross Heat to Power	kW	1177,0	1072,0
Energy to Coolant and Lubricating Oil	kW	500,0	455,0
Heat Dissipation Capacity *	kW	206,0	192,0
Energy to Exhaust	kW	853,0	777,0
Heat to Radiation	kW	84,0	77,0
*			

^{*}Intake Intercooled system

JCB ALTERNATOR TECHNICAL PARAMETERS AND SPECIFICATIONS



ALTERNATOR TECHN	NICAL PARAMETERS				
Insulation Class		Н	Field Control System		Self-Excited
Winding Pitch		2/3 - (N° 6)	A.V.R. Model	Standard	MX341+PMG
Wires		6	Voltage Regulation	%	± 1
Protection		IP 23	Sustained Short-Circuit Current	10 sec	300% (3 IN)
Altitude	m	1000	Total Harmonic (*) TGH / THC	%	< 4
Overspeed	rpm	2250	Wave Form: NEMA = TIF - (*)		< 50
Air Flow	m³/sec.	1,614	Wave Form: I.E.C. = THF - (*)	%	< 2
Bearing Drive	N/A	-	Bearing Non-Drive	Bearing	6317-2RZ
Rotor Winding	100%	Copper	Stator Winding	100%	Copper



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



ALTERNATOR SPECIFICATIONS

50 HZ / 231-400V COS	Q 0,8 / 1500 RPM								
STANDARD USING ALTERNATOR				OPTIONAL USING ALTERNATOR					
BRAND/MODEL	JCBENERGY	JCB 400MX		LEROY-SO	OMER"	LSA 50.2M6	STAMFORD	НС6К	
DUTY				Continuous				Stand By	
AMBIENT	C°			40°C				27°C	
CLASS / TEMP. RISE	C°			H/ 125° K				H/ 163° K	
SERIES STAR	V	380/220	400/231	415/240	1 Phase	380/220	400/231	415/240	1 Phase
PARALLEL STAR	V	190/110	200/115	208/120	220	190/110	200/115	208/120	220
SERIES DELTA	V	220	230	240	230	220	230	240	230
OUTPUT POWER	kVA	1136,0	1136,0	1178,0	-	1250,0	1250,0	1296,0	-
OUTPUT POWER	kW	908,8	908,8	942,4	-	1000,0	1000,0	1036,8	-

60 HZ / 277-480V COSQ (0,8 / 1800 RPM								
STANDARD USING ALTERNATOR					JSING ALTEI	RNATOR			
BRAND/MODEL	JCBENERGY	JCB 400S		LEROY-S	OMER" T	AL049D	STAMFO	ORD	нс6н
DUTY				Continuous				Stand By	
AMBIENT	C°			40°C				27°C	
CLASS / TEMP. RISE	C°			H / 125° K				H / 163° K	
SERIES STAR	V	416/240	440/254	480/277	1 Phase	416/240	440/254	480/277	1 Phase
PARALLEL STAR	V	208/120	220/127	240/138	-	208/120	220/127	240/138	-
SERIES DELTA	V	240	254	277	240	240	254	277	240
OUTPUT POWER	kVA	1026,0	1080,0	1137,0	-	1129,0	1188,0	1251,0	-
OUTPUT POWER	kW	820,8	864,0	909,6	-	903,2	950,4	1000,8	-



231 / 400 V - 50 Hz & 277 / 480 V - 60 Hz



CONTROL MODULE ALERTS

Emergency Stop Malfunction
High Generator Frequency
Low Generator frequency, Low Load
Over Current, Unbalanced Current
Low Generator Voltage
High generator Frequency
Phase sequence error
Overload, Heat Sensor Broken
Low Water Level (Optional)
Low Oil Pressure, Reverse Power

Start Error, Stop Error
Magnetic Pickup Error
Charge Alternator Error
Unbalanced Load
Maintenance Time Alarm
Low Speed, High Speed
Broken Oil Sensor Cable
High Oil Temperature (Optional)
Low Fuel Level (Optional), High Battery Voltage
Low Battery Voltage, High Water Temperature
Electronic Can bus Errors (ECU)

CONTROL PANEL SPECIFICATIONS



Low Water Temperature



- Powder Painted Steel Panel with Lockable Door
- ATS (Automatic Transfer Panel)-Ontional
- Control Module
- Battery Charger
- Emergency Stop Button

- Terminal Blocks
- Load Output Terminal
- System Protection MSBs
- Circuit Breaker-Optional
- o LCD Screen
- Control Relays
- Backlit, 128x64 Pixels

CONTROL MODULE TECHNICAL PARAMETERS

Brand	JCBENERGY	Brand	Trans-MIDIAMF.232.GP	
Dimensions	120mmx94mm.	Protection Class	IP65 From the Front	
Weight	260 gr.	Environmental Conditions 2000 meters above sea level		
Ambient Humidity	Max. %90.	Ambient Temperature	-20°C to +70°C	
DC Battery Supply Voltage	8 - 32 V	Battery Voltage Measurement	8 – 32 V	
Network Frequency	5 - 99,9 Hz	Mains Voltage Measurement	3 - 300 V phase -Neutral, 5 - 99,9 Hz	
Generator Voltage Measurement	3 - 300 V	Generator Frequency	5 - 99,9 Hz	
Current Transformer Secondary	5A	Working Period	Continuous	
Charge Alternator Voltage Measurement	8 - 32 V	Charge Alternator Excitation	210mA &12V, 105mA &24V Nominal 2.5W	
Communication Interface	RS-232	Analog Sender Measurement	0 - 1300ohm	
Generator Contactor Relay Output	5A & 250V	Mains Contactor Relay Output	5A & 250V	
Solenoid Transistor Outputs	1A with DC Supply	Start Transistor Outputs	1A with DC Supply	
Configurable-3 Transistor Outputs	1A with DC Supply	Configurable-4 Transistor Outputs	1A with DC Supply	



231 / 400 V - 50 Hz & 277 / 480 V - 60 Hz



CONTROL MODULE FUNCTION

Mains Voltage Level Control	Generator Voltage Level Control	3 Phase Generator Protections	3 Phase AMF Function	Alarm Horn
Network Frequency Level Control	Generator Frequency level Control	- High / Low Voltage	- High / Low Frequency	Heater Tube Thermostat Control
Engine Operating Option Control	Generator Current Level Control	- High / Low Frequency	- High / Low Voltage	Modbus and SNMP
Engine Stop Option Control	Generator Powder Level Control	- Current / Voltage Asymmetry	- High / Low Water Temperature	Working Hour
Engine Speed (RPM) Level Control	Generator work Schedule and Timing Control	- Overcurrent / Overload	- High / Low Load	Ground Leakage
Battery Voltage Options Times	Oil Pressure Controllers Control	Overheat Control	Mains., Generator ATS Control	Analog Modem
Check Engine Maintenance Times	Configurable Analog Inputs and Outputs	1 Phase or 3 Phase, Phase Selection	Network, Voltage, Frequency Display	Ethernet, USB, RS232, RS485
Communication Interfaces GPRS, GSM	Keeping Error Records of Past Events	Parameter Setting via Control Module	Parameter Setting via Computer	Selectable Protection Alarm / Shutdown
Engine Speed, Voltage, Earning	Configurable Programmable Digital Inputs and Outputs	Water Temperature Current and Frequency	Hours of Operation Phase sequence	Battery Voltage Oil Pressure

SOUND PROOF CANOPY AND BASE FRAME (CHASIS) SPECIFICATIONS



- Special, Registered JCB Energy Design and Colour
- A1 Quality DKP / HRU / Galvanized Steel
- Sensitive Twist on Automatic Press Brake
- Delicate Cut on Automatic Punch and Laser Bench
- Sensitive Welding on Robotic Welding Bench
- Chemical Cleaning Nano Technology Before Painting
- Robotic Painting with Electrostatic Powder Paint
- o Drying and stabilizing on 200 ºC Ovens
- 1500 Hour Salt Test
- o Glass wool Isolation, A1 Class Material -50/+500 ºC
- Special Covering Over Glass Wool
- Best Sound Level (in Dba)
- Temperature Tests
- Rustproof Accessories

- Cable Exit Connectors and Glands
- Emergency Stop Button
- Fuel Level Gauge
- Fuel Drain Cap
- Fuel Inlet and Return Records
- I permeability Test for Fuel Tank
- Vacuumed Rubber Mounted
- High Quality weatherstrips
- High Quality Shock Absorbers
- Fuel Filling Cap (with ventilation)
- Lifting and Carrying Equipment
- Internal Exhaust Mufflers (Silencers)
- External Exhaust Mufflers (Silencers)
- Radiator water Filling Cap
- Daily Fuel Tank, External Fuel Tank

Our Quality Certificates

