# Wrap-around labeling

# Looking to enter the personalized medicine market?



## Wrap-around labeling

# The 211 HC processes small batches efficiently and reliably

The ability of fully automatic labeling machines to offer cost effectiveness and process reliability is soon compromised if it comes to small batch sizes and products that tend to tip over, such as small vials, syringes and cartridges. For these types of products, the semi-automatic wrap-around labeler 211 HC combines the high flexibility of manual product feeding with a complete equipment according to pharma specifications.





### Best results

With its flexible adjustment options, the wrap-around labeler 211 HC is perfect for small glass vials, syringes, cartridges and pens, which are difficult to label because of their shape, size or weight.



As well as a thermal transfer printer for variable data – typically the batch number and expiry date – the pharma equipment includes the integration of various camera systems to verify printing and codes.



Cylindrical and largely stable in form products are rotated in a motor driven roller prism. The label is then precisely dispensed by the pneumatic pivot peel plate and applied to the product by a roller.





# Useful options

In addition to the option of integrating a thermal transfer printer, the machine can be prepared for, or fully equipped with a laser printer for variable data and codes.



For labeling frequently changing products with different dimensions, format parts with quick-change unit can be supplied as an option. This allows easy format changes at any time without long changeover times.



The 211 HC wrap-around labeler offers a wide range of additional options if required, such as aligned wrap-around labeling to a defined scan mark, pneumatic product fixing, and a bad label return function.



### **Technical data**

Labeling type: Wrap-around labeling

Product specifications: Cylindrical, largely stable in form Product dimensions: 10 - 70 x 30 - 130 mm (D x H)

Label dimensions: 15 - 80 x 30 - 220 mm (W x L)

Capacity: Up to 15 products/minute

Power supply: 230 V, 50 Hz, 1 phase

120 V, 60 Hz, 1 phase (optional)

Compressed air supply: 6 bar

Printer: Various hot-foil, thermal transfer and laser printers (optional)

Components: Control panel with 7 inch touchscreen, signal column, two-handed


start, applicator, printer, print check, roller prism, Siemens control

Options: Code check, bad label return, pneumatic product fixing,

aligned wrap-around labeling, format parts with quick-change unit,

Allen-Bradley control, movable version, qualification

Note: If optional features are chosen, the above data may vary

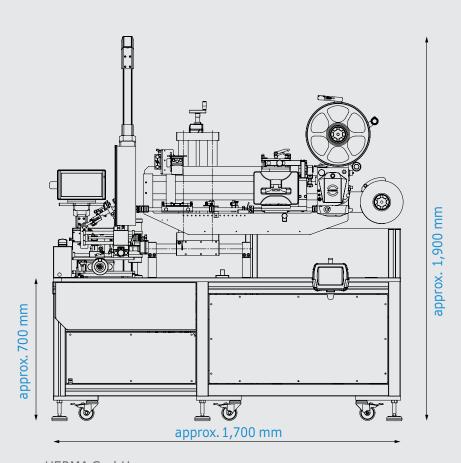



HERMA GmbH Labeling Machines Division Heinrich-Hermann-Straβe 14 70794 Filderstadt Tel. +49 711 7702-6012 www.herma.com/machines

machines@herma.com