



**MECHANICAL ENGINEERING
FOR PRECISE TUBE PROCESSING
WITHOUT LIMITS.**




transfluid
The solution for tubes. 

transfluid® WE HAVE THE RIGHT SOLUTION.

With transfluid®, you bring high end technology to your production. Our solutions, services and systems are attuned to what you need to produce on the world market level. For your requirements and even more complex challenges, for individual units or serial production in consistently high quality – with customised high-tech developments or our high-performance machine standards: transfluid® has the solution to advance your ideas.

CONTENTS

t bend – pipe bending machines	
– Servo-electric	4
– Servo-hydraulic	6
– Compact	8
– Robotic bending	9
t project – Software	11
Loading systems	12
Portfolio of machines	14
t form – Tube forming machines	
– Rolling forming machines	16
– Axial forming machines	18
– Combination machines	19
t work – Mobile and compact machines	20
t cut – Pipe cutting machines	22
t motion – Automation	23

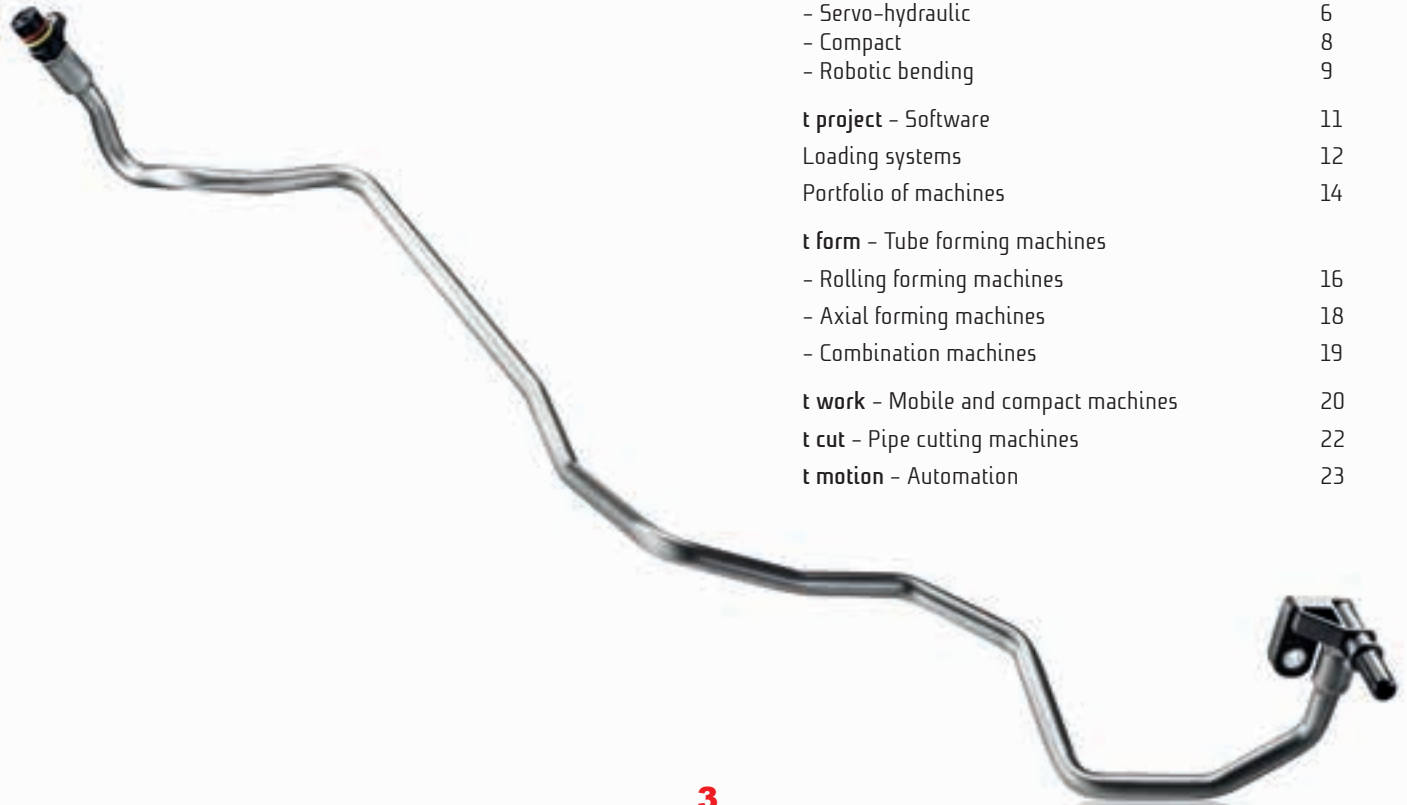

T BEND - MANDREL BENDING MACHINES RIGHT/LEFT BENDING WITH CNC-CONTROL

For better efficiency. The electric axes can be programmed in synchronicity to give optimum cycle times. Tools for bending on multiple levels with automated tool change make it possible to achieve various radii and the most complex geometries on tubes.

With our clockwise/counterclockwise bending machines – also available with push bending function – the most complex bends become reality with great accuracy.

AVAILABLE MACHINE SIZES

Model	Pipe- ϕ	Max. Radius
DB 622-CNC-R/L	6 - 22 mm	66 mm
DB 630-CNC-R/L	6 - 30 mm	90 mm
DB 642-CNC-R/L	6 - 42 mm	168 mm
DB 2060-CNC-R/L	6 - 60 mm	180 mm

BASIC EQUIPMENT:

- Bending head for bending right-hand and left-hand with one collet
- Bending head can be positioned horizontally and vertically
- Multilevel bending – Bending head can be equipped with multiple tool sets
- Hollow shaft for tooling for small radii
- Minimum clamping length on the tube end
- Chuck for use of segment collets
- Following pressure die for bends up to 180°
- Central lubrication
- Controlled mandrel withdrawal
- Mandrel lubrication
- t control operating software
- Air conditioning for the electrical cabinet

OPTIONAL EQUIPMENT:

- Usable length 2000 mm, 3048 mm, 4572 mm & 6096 mm
- Repeated gripping
- Push bending of large bending radii
- Boosting function (Centerline booster)
- Automatic loading
- Positioning of weld seam
- Remote diagnostics
- Carriage for wiper die
- Safety Cover & Scanner
- Software t project Basic, t project Professional etc.



watch the
movie

T BEND - SERVO-ELECTRIC MANDREL BENDING MACHINES

The solution for the future. Highly dynamic and flexible, thanks to the 100 % servo-electric technology. The equipment of our mandrel bending machines with fully automated controls can be customized and individually selected and adapted.

AVAILABLE MACHINE SIZES

Model	Pipe- ϕ	Max. Radius
DB 622-CNC-VE	6 - 22 mm	66 mm
DB 630-CNC-VE	6 - 30 mm	90 mm
DB 642-CNC-VE	6 - 42 mm	168 mm
DB 650-CNC-VE	6 - 50,8 mm	150 mm
DB 2060-CNC-VE	6 - 60 mm	150 mm
DB 2080-CNC-VE	6 - 80 mm	240 mm
DB 20100-CNC-VE	20 - 101,6 mm	305 mm
DB 40130-CNC-VE	20 - 127,3 mm	390 mm
DB 40150-CNC-VE	20 - 150 mm	450 mm

BASIC EQUIPMENT:

- Bending direction clockwise
- Bending head can be positioned horizontal and vertical
- Multilevel bending - Bending head can be equipped with minimum three tool sets
- Hollow shaft for using tooling for small radii
- Minimum clamping length on the tube end
- Chuck for use of segment collets
- Following pressure die for bends up to 180°
- Central lubrication
- Controlled mandrel withdrawal
- Mandrel lubrication
- Basis Software t control

OPTIONAL EQUIPMENT:

- Usable length 2000 mm, 3048 mm, 4572 mm & 6096 mm
- Repeated gripping
- Push bending of large bending radii
- Boosting function (Centerline booster)
- Cutting during bending process
- Automated loading
- Positioning of weld seam
- Remote diagnostics
- Carriage for wiper die
- Safety cover & scanner
- Software t project Basic, t project Professional etc.



watch the
movie

T BEND - SERVO-HYDRAULIC TUBE BENDING MACHINES

Stable, flexible and economical. This series will win you over with its special stability and performance. Individual pieces and small series can be produced in an extremely economical manner with this machine concept. The use of high-value components ensures the machine's durability.

AVAILABLE MACHINE SIZES

Model	Pipe- ϕ	Max. Radius
DB 642-3A-CNC	6 - 42 mm	126 mm
DB 2060-3A-CNC	6 - 60 mm	180 mm
DB 2090-3A-CNC	6 - 88,9 mm	270 mm
DB 40120-3A-CNC	20 - 120 mm	360 mm
DB 40139-3A-CNC	40 - 140 mm	420 mm
DB 40168-3A-CNC	40 - 170 mm	510 mm
DB 40220-3A-CNC	40 - 220 mm	700 mm
DB 60273-3A-CNC	60 - 273 mm	820 mm
DB 80330-3A-CNC	80 - 325 mm	975 mm

BASIC EQUIPMENT:

- Bending direction clockwise
- Hollow shaft for using tooling for small radii
- Minimum clamping length on the tube end
- Chuck is equipped with bayonet lock for quick tool change
- Following pressure die for bends up to 180°
- Central lubrication
- Basis Software t bend control

OPTIONAL EQUIPMENT:

- Usable length 2000 mm, 3048 mm, 4572 mm & 6096 mm
- Multilevel bending - Bending head can be equipped with minimum three tool sets
- Repeated gripping
- Push bending of large bending radii
- Boosting function (Centerline booster)
- Cutting during bending process
- Automated loading
- Positioning of welding seam
- Remote diagnostics
- Carriage for wiper die
- Controlled mandrel withdrawal
- Mandrel lubrication
- Safety cover & scanner
- Software t project Basic, t project Professional etc.



watch the
movie



T BEND - COMPACT MANDREL BENDING MACHINES

Compact and very efficient. Our fully hydraulic mandrel bending machines deliver outstanding bend quality and very simple handling, with SPS control for preselection and storage of bending angles via touch panel.

The machines are extremely robust and easy to operate. A selection of set-ups is available to process tubes of different lengths, with an operational length up to 6 m.



Accessories are available, like an integrated saw, a de-burring device, a flaring tool, and a compression-fitting swaging tool.

AVAILABLE MACHINE SIZES

Model	Pipe- ϕ	Max. Radius
DB 642 K	6 - 42 mm	105 mm
DB 2076 K	6 - 76,1 mm	150 mm
DB 20101 K	6 - 101,6 mm	250 mm

OPTIONAL EQUIPMENT:

- Usable length extension
- Length stop device
- Off-set bending device
- Digital display of the length and rotation, with tolerance range, if required
- Controlled mandrel withdrawal
- Mandrel lubrication
- Following pressure die
- Additional functions can be added (pre-assembly, flaring, de-burring, cutting)

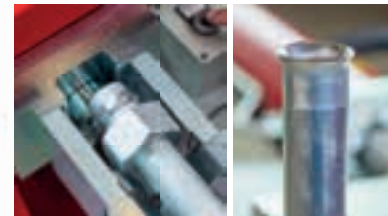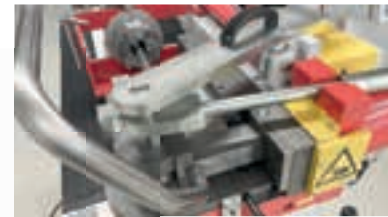

watch the
movie

T BEND – ROBOTIC BENDING TECHNOLOGY

Maximum bending freedom. The robotic bending technology combines the greatest versatility in manufacturing steps and simple handling. The robot head is equipped with a clockwise and counterclockwise bending head, so that bending can happen in both direction once clamped.

The eight synchronized and fully electric axes give maximum versatility when processing tubes. The bending process on tubes, including the endforms and add-on components can be done without any problems. The add-on components can be positioned automatically, if needed. A radii/plane changer with up to 6 tools per bending system is integrated to give maximum flexibility.

MACHINE SIZE




DB 622-ROBO-R/L
Pipe- \varnothing : 6 - 22 mm \varnothing

OPTIONAL EQUIPMENT:

- Left/Right bending system
- Multilevel bending
- Push bending of large bending radii
- Automated loading
- Positioning of welding seam






watch the
movie

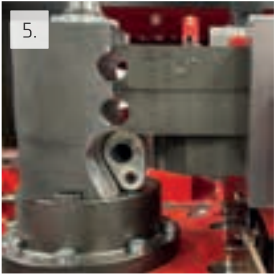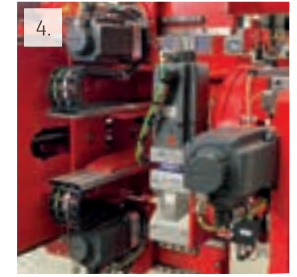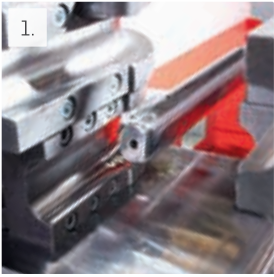

BASIC & OPTIONAL EQUIPMENT:

1. Bending mandrels in different contours or materials
2. Wiper die, bending mandrel and chuck with segment collets
3. Push bending function
4. Powerful servo motors
5. Bending tools for tubes with already formed tube ends
6. Specific contoured tools for bending of wire or square material
7. Integrated cutting device
8. Following pressure die
9. 360° rotating bending head right/left
10. Bending of end-formed tubes
11. Bending without mandrel for small tube diameters
12. Central lubrication
13. Powerful control unit
14. Hand scanner for loading bending programs

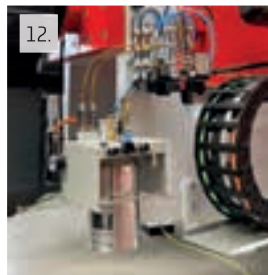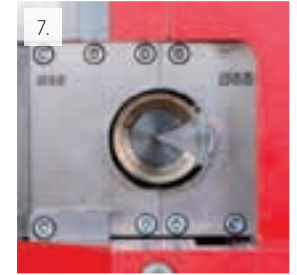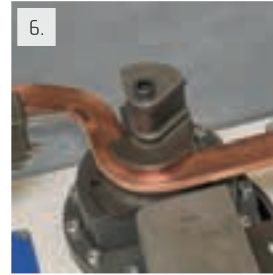

T PROJECT - SOFTWARE: VIRTUAL SUPPORT FOR HIGHER EFFICIENCY

Fewer steps to the finished workpiece: With t project you can see all the variables of the bending process before starting the production. Even complex bending geometries can be planned and executed in a material-adapted and collision-free manner. The virtual bending simulation determines exact bending times and cutting lengths and checks tube geometries for feasibility in advance.

Tube data and bending results are documented with accuracy and they can then be replicated 100%. The common interfaces are available for the import and export of data and connection to PDA or ERP over the network.

Our solution for your individual requirements

We have developed four versions of our t project software, which can be used as single or network versions. t project can be integrated centrally in the company's internal security system for optimum data security. Customer-specific modifications, expansions or interfaces are readily possible.

t project Basic

Input and calculation of tube processes




- Direct conversion of isometrics into bending data
- Automatic calculation correction values and over-bending parameters
- The dimension of the spatial diagonal from the beginning of the pipe A to the end of the pipe B enables the operator to easily check the bent part manually.
- The software can interface with measuring devices and CAD and Office programs. Supported file formats include IGES, STEP, JT and PCF.



t project Professional



Input and calculation of tube processes, including collision testing

- Same basic features as t project Basic
- Necessary tube length extensions are detected and added
- Additional production safety: the collision test will determine the feasibility of the tube geometry before the actual bending process, which prevents collisions with the machine itself or its surroundings
- The software will suggest alternative options in case of predicted collisions
- The software will take all the measurements for the collision test from the CAD model of the bending machine
- Surrounding features in the room can also be included in the collision test (pillars, shelves, floor etc.)
- It is also possible to run simulations with tubes that already have flanges or other end-forms.

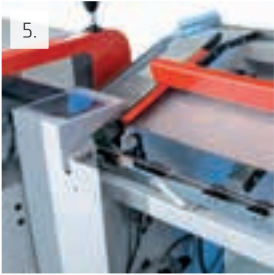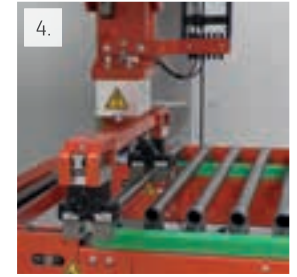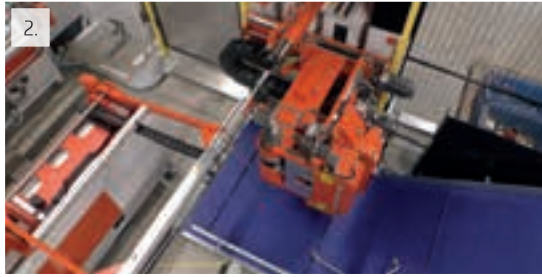


LOADING SYSTEMS:

1. Alignment station
2. Swivel arm feeder
3. Conveyor feeder
4. Chain feeder
5. Loading tables
6. Bowl feeder
7. Step feeder

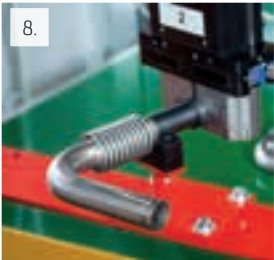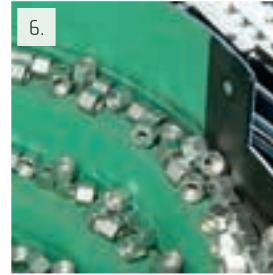

HANDLING AND GRIPPER SYSTEMS:

8. Outer gripper
9. Handling robots
10. Rotating module
11. Overfloor handling
12. Overfloor handling
13. Underfloor handling
14. Inner and outer gripper

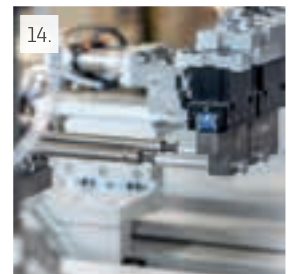


LOADING & UNLOADING SYSTEMS DESIGNED AND MANUFACTURED BY transfluid®

We offer a great variety of loading systems for all the machines, depending on the material, tube diameter and tube length. Tubes that have already been formed and have added components can also be loaded. The appropriate orientation is therefore very important, when loading the tube into the production cell. External workpieces, such as nuts, flanges and supporting sleeves can be added to the system in a controlled manner and included in any subsequent processing steps. A great variety of loading volumes is possible.

The right system for every requirement

There is a great variety of handling systems available, dependent on the length of the workpiece. For short tubes, there are systems gripping from below with insertion axis, and for long tubes there are systems handling from above. Both options can be used in our combination systems. They guarantee ideal access for the operator, so they can complete the set-up and any maintenance operations in the best possible way.

All these systems are specially designed and produced by transfluid for our bending machines. This ensures optimal integration and functionality.

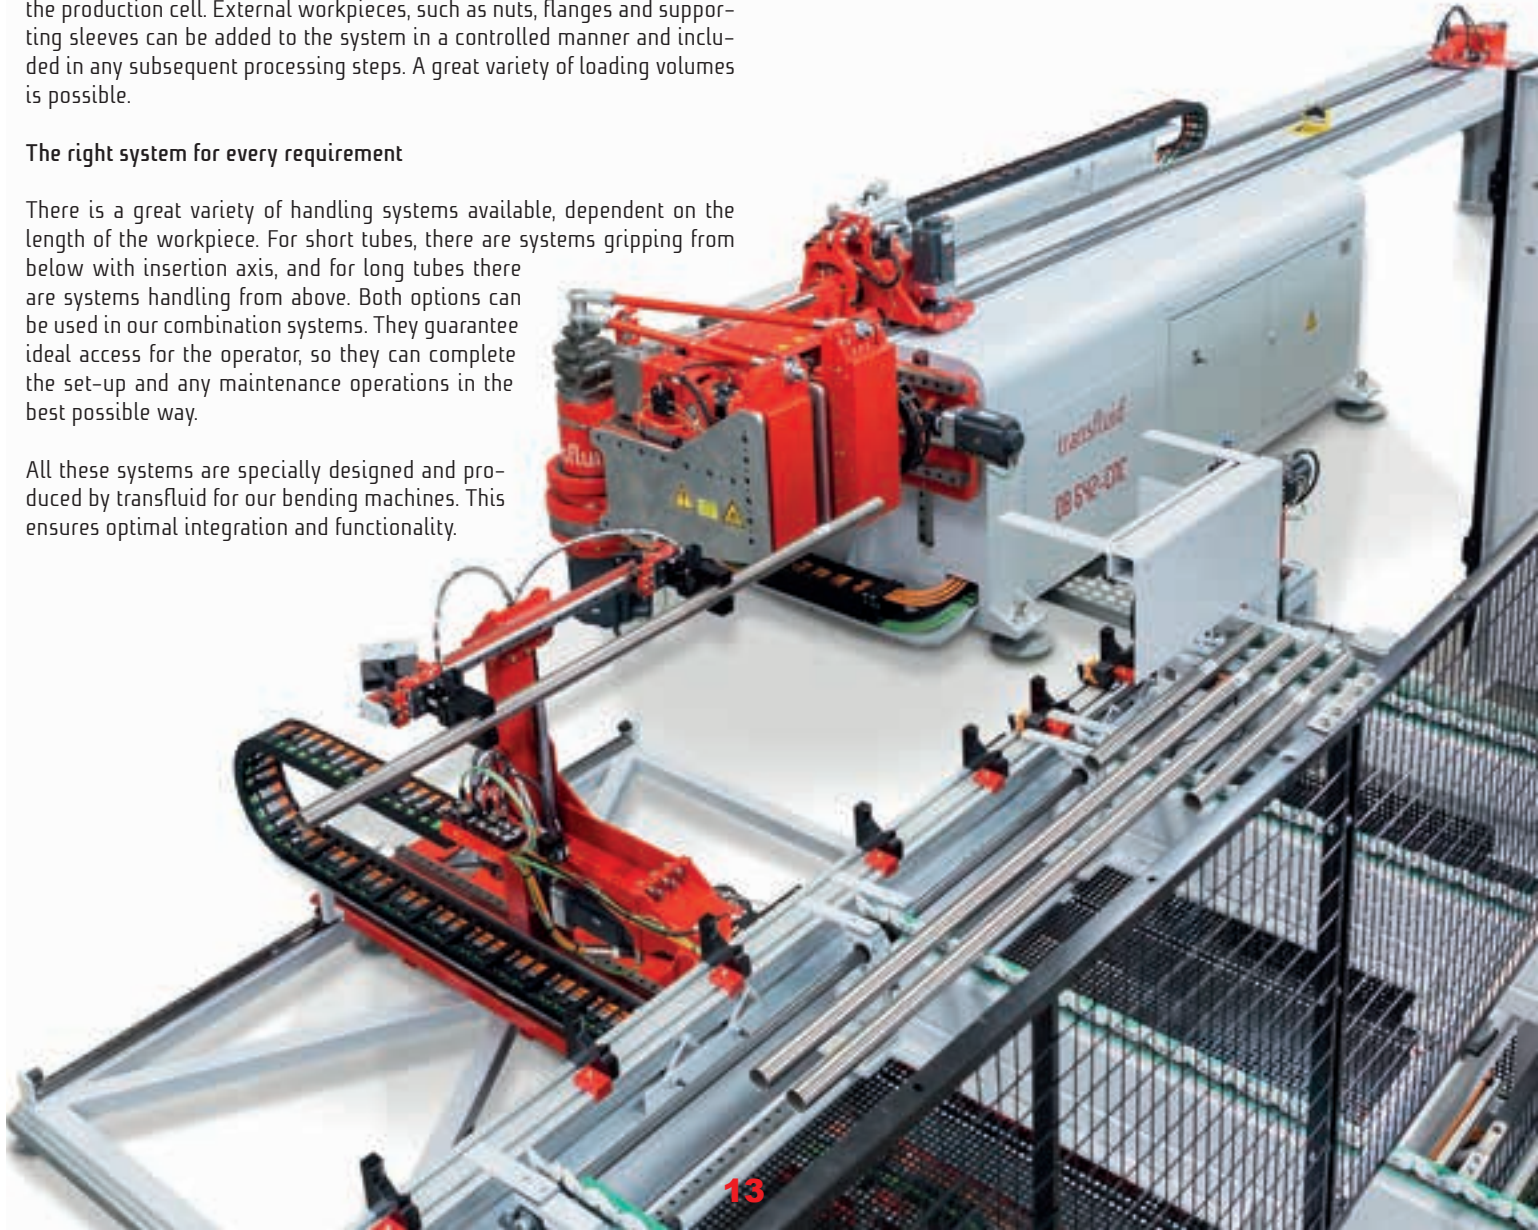

Our portfolio of machines

t bend – Robotic bending machines



t bend – Mandrel bending machines with servohydraulic motors



t bend – Fully electric mandrel bending machines



t bend – Fully electric mandrel bending machines – 360° rotating bending head right/left



t bend – Fitting bender



t bend – Compact mandrel bending machines



t bend – Mobile bending machine



t form - UMR Rollforming machines



t form - AM Collaring machine



t cut - RTO Chipless orbital cutting machines



t form - REB Axial forming machines



t form - SRM Rollforming machines



t form - REB/SRM Combination machines



t work - Tube chamfering machines - Pre-assembly machines - Flaring machines - Tube deburring machines - Electro-hydraulic drive unit



T FORM - TYPE UMR ROLLFORMING MACHINES

Powerful and fast forming. The type UMR tube forming machines use smart operating technology with many predefined settings that can be retrieved automatically to achieve perfect mirror-like surfaces.

When producing flares with 20°-90° angles, with a clamping length of 1 x D, the machine achieves perfect sealing surfaces. Flaring up to 90° can be produced in a single cycle. Tools can be changed extremely fast. With the appropriate tools the machine can also close tube ends.


AVAILABLE MACHINE SIZES

Model	Pipe- ϕ	Wall thickness max.	Cycle time
UMR 628	6 - 28 mm	2,5 mm	4 - 10 Sec.
UMR 642	6 - 42 mm	4,0 mm	4 - 15 Sec.
UMR 30115	30 - 115 mm	4,0 mm	10 - 45 Sec.



EQUIPMENT OPTIONS:

- Automatic release
- Foot-switch
- Microlubrication system
- Processing of support rings

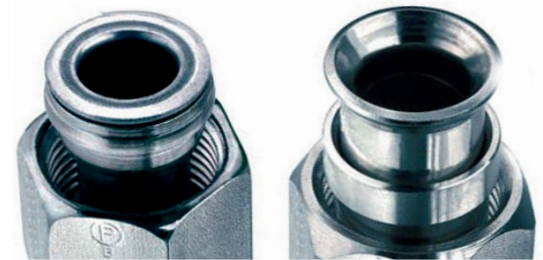

watch the
movie

T FORM - TYPE SRM ROLLFORMING MACHINES

Forming - Cutting - Retrimming - Thread Rolling. Our roller burnishing technology increases the possibilities of forming tubes with minimal tooling. All drives are servo-electrically designed and CNC-controlled if required.

Different tool versions expand the processing possibilities for chipless cutting or post-bending cutting. The machines can produce internal and external profiles and can also roll in synchronicity thanks to a special tool head (inside/outside).

AVAILABLE MACHINE SIZES


Model	Pipe- ϕ	Wall thickness max.	Cycle time
SRM 622	4 - 22 mm	1,0 mm	4 - 10 Sek.
SRM 1565	15 - 65 mm	1,5 mm	8 - 14 Sek.
SRM 40127	40 - 127,3 mm	2,0 mm	15 - 50 Sek.
SRM 50176	50 - 176 mm	3,0 mm	15 - 60 Sek.



watch the
movie

EQUIPMENT OPTIONS:

- Processing unit with radial and axial servo-electric advancement
- Rollforming unit with push bending through CNC control
- Ejector for controlled ejection of the remnants
- Microlubrication systems
- Coded tools
- Belt filter system
- Stored setting parameters
- Safety enclosure including light barriers
- Safety device two-hand operation
- Remote diagnostic system

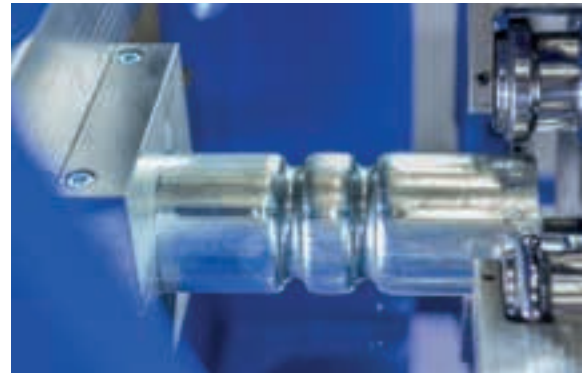

T FORM - AXIAL FORMING MACHINES

ACCURATE FORMING WITH FAST TOOL CHANGE.

Our type REB axial forming machines, with their compression power of up to 1,300 kN, are particularly well-suited to effortlessly master complex geometries. With up to 6 forming steps in combination with an additional clamping unit they will satisfy almost all requirements. The operation is simple and intuitive with a touch panel. The sequence control makes each separate movement of the respective forming step user-friendly and fully programmable individually.

We offer the option to equip our systems with electric or hydraulic-numerical drives. These forming processes can be completed stepwise in transfer systems to achieve very short cycle times. Simultaneous axis movements ensure fast production processes and an efficient and highly dynamic production.

AVAILABLE MACHINE SIZES

Model	Pipe- ϕ	Forming length	Cycle time/Stage
REB 420	4 - 20 mm	60 mm	2 - 3 Sec.
REB 632	6 - 32 mm	80 mm	2,5 - 3,5 Sec.
REB 645	6 - 45 mm	90 mm	3 - 5 Sec.
REB 660	6 - 60 mm	180 mm	5 - 8 Sec.



watch the movie

EQUIPMENT OPTIONS

- Servo-electric control of forming axis
- Up to additional 6 forming steps
- Supplementary clamping device
- Microlubrication system
- Tool encoding
- Tool recognition
- Loading and positioning of components



T FORM - COMBINATION MACHINES IN FORM, DOUBLE STRENGTH.

For the optimum processing of your individual requirements we simply combine our transfluid forming techniques, particularly the axial forming and the rolling forming. The additional clamping unit makes even extreme forming feasible in one work sequence. The cutting before axial tube forming is also possible, such as the rolling forming of a pre-formed geometry. That saves you valuable time.

A strong partnership: axial forming and rolling forming

Our t form combination machine is the perfect union of axial and rolling tube processing, with up to 6 axial forming steps, two rolling forming stations, two powered tool holders for flange orientation and an additional clamping unit. The horizontal clamping system makes the processing of bent tube geometries possible.

AVAILABLE MACHINE SIZES

Model	Pipe- ϕ	Forming length	Cycle time/Stage
REB/SRM 632/622	6-32 mm (rollforming up 22 mm)	80 mm compress 40 mm rollforming	3-4 Sec./Stage + 4-10 Sec. rollforming
REB/SRM 645/622	6-45 mm (rollforming up 22 mm)	90 mm compress 40 mm rollforming	4-5 Sec./Stage + 4-10 Sec. rollforming
REB/SRM 660/622	6-60 mm (rollforming up 22 mm)	180 mm compress 40 mm rollforming	5-9 Sec./Stage + 6-10 Sec. rollforming
REB/SRM 660/1565	6-60 mm (rollforming up 65 mm)	180 mm compress 80 mm rollforming	5-9 Sec./Stage + 8-14 Sek. rollforming

EQUIPMENT OPTIONS

- Up to 6 additional forming steps
- Additional rolling forming stations
- Rolling forming unit with free-form function and CNC control
- Additional clamping units
- Microlubrication system
- Automatic release
- Feeding of external workpieces
- Positioning of the flaring/workpieces with servo-electric rotation of the tools
- Holder for rotating tools (deburring, camfering, facing, rolling)



watch the
movie

MOBILE AND COMPACT T WORK TUBE BENDING MACHINES: THE SMART SOLUTION FOR BENDING TUBES.

MOBILE BENDING MACHINE

The smart companion for many different operating sites: a great variety of machine sizes are available, from 6 mm to 115 mm. This unmatched, tried and tested transfluid classic is a compelling option, thanks to its many benefits, its a good price/performance ratio and its a very simple, but effective technology and unique quality.

Machine sizes/tube size:

MB 642	6 - 42 mm Ø
MB 2060	6 - 60 mm Ø
MB 3080	6 - 90 mm Ø
MB 30115	6 - 115 mm Ø

Equipment options:

- Saw
- Deburring unit
- Installation equipment (cutting ring/flaring tool)



Tube deburring machine

The tube deburring machines with servo-electric drive offer external and internal deburring of hydraulic tubes. The durable and efficient milling tools can debur any cuts.

The tools are easy to remove, sharpen and refit.

TUBE SIZES:

- 6 - 42 mm
- 20 - 60 mm

Rotational forming machine

With our forming machine with rotating head you can achieve high-quality results. The forming of tube ends with angles between 37° and 90° is tool-dependent possible with the rotating method. Perfect sealing surfaces and short clamping length can be achieved with ease.

- Manual clamping
- Manual feed with hand pump
- Electric rotational tool holder
- Working range: 6 - 42 mm



WE COMBINE MINIMUM EFFORT WITH MAXIMUM PERFORMANCE



Tube chamfering machine

The transfluid tube chamfering machines are fitted with different drives and tools for the different tube sizes. It is possible to chamfer tubes with wall thickness up to 20 mm with special blade-heads.

The whole range of tube diameters is covered without changing tools.

- For the preparation of the welding seam of tubes with a 30° angle
- Other angles available on request



Pre-assembly devices, automatic orientation and pressure recognition

The efficient assembly solution for medium and large series for the pre-assembly of cutting rings and multiple cutting rings for DIN 2353. The machine can be fitted to be mobile or stationary.

- Fast cycle times
- Secure processing (pressure and direction control)
- Digital input and storage of process data
- High assembly freedom
- For tubes from 6 - 42 mm



Electro-hydraulic drive unit

As combination or individual machine for classic cutting ring fitting and 37° flare: our devices with electro-hydraulic drives work with great precision.

The light, convenient and powerful transfluid pre-assembly and flaring devices for the external assembly are the perfect starting point for reliable quality assembling.

- Suitable for tube sizes between 6 - 42 mm
- Interchangeable attachments

T CUT - CHIPLESS ORBITAL CUTTING MACHINES

Created for precision. Our chipless orbital cutting machines make precise cutting results possible. Your tubes can be formed immediately afterwards. That saves time and money.

AVAILABLE MACHINE SIZES

Model	Pipe- ϕ	Wall thickness max.	Cycle time
RTO 628	6 - 28 mm	2,0 mm	2,2 - 8,0 Sec.
RTO 650	6 - 50,8 mm	2,5 mm	2,2 - 8,0 Sec.
RTO 2080	20 - 80 mm	3,0 mm	6 - 10 Sec.
RTO 20100	20 - 100 mm	3,0 mm	6 - 12 Sec.

EQUIPMENT OPTIONS:

- Special software to optimize number of cuts
- Marking systems

Different tube loading concepts:

- Decoiler with pulling unit for tube coils
- Straightening unit for different tube diameters and straightness requirements
- Loading table for bars
- Belt feeding systems for bars, large tube diameters and longer tubes
- Step belt feeding systems for bars, small tube diameters and longer tubes

Flexible release:


- Separate, controlled release for cut workpiece and scrap
- Sorting system for up to eight tube cuts
- Direct transfer to next step in the process



watch the
movie



watch the
movie

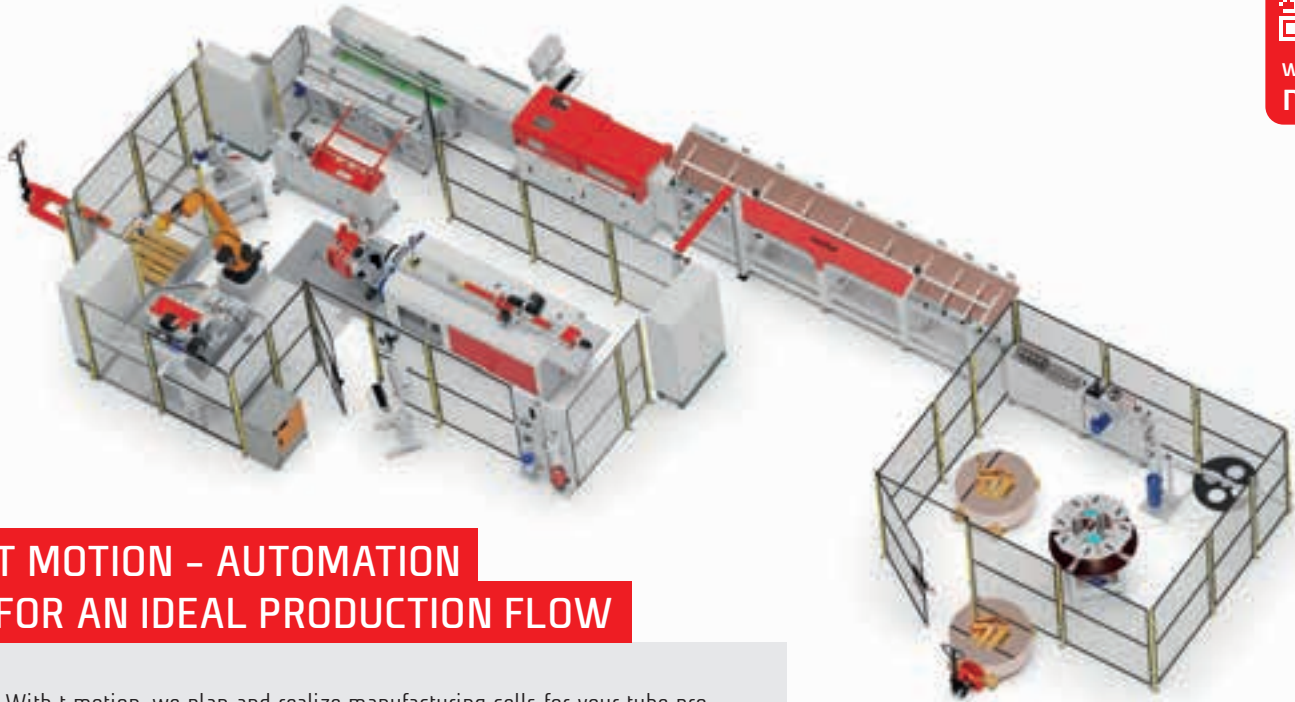

T MOTION - AUTOMATION FOR AN IDEAL PRODUCTION FLOW

With t motion, we plan and realize manufacturing cells for your tube processing with optimized material flow. We design a layout to match your requirements and integrate all the required processing and handling options. With more than 25 years of experience in automation, we can offer you the solution for tubes at the highest level.

On request, we can include product marking, as well as optical, contactless camera control systems for comprehensive control of geometries or surfaces. The option to punch holes can also be integrated, as well as transfer lines to achieve the shortest possible cycle times, or systems for loading and controlled unloading, for your very own, customised automation solution.

Plug in and Produce – With t motion, you are production-ready from the start and flexible also in batch production, without any time delay.

Customizable – Further process steps, like loading and unloading systems or additional tube processing tasks, can be easily integrated.

Industry 4.0 – Interfaces with data caption systems for consumption and operation enable the digitalization and evaluation of the data.

Fast and accurate – The high degree of automation means fast cycle times for efficient manufacturing.





transfluid[®]
The solution for tubes. 

transfluid[®]
Maschinenbau GmbH

Hünegräben 17-24
D-57392 Schmallenberg
Germany

Tel.: +49 29 72 / 97 15-0
Fax.: +49 29 72 / 97 15-11

info@transfluid.de
www.transfluid.net