
SUSPENDED WORKING PLATFORM STANDARD







- **★ Scaffold-friendly through the use of standard 1**½" tubes ★
 - **★** Platform parts are easy to assemble and disassemble which makes transportation easy and saves time **★**
 - **★** Robust and durable due to full galvanisation ★
- **★** Easy to use due to low weight of platform and outrigger ★
- ★ No losable small parts ★ Outrigger can be used as three-legged or four-legged variants ★

SUSPENDED WORKING PLATFORM STANDARD

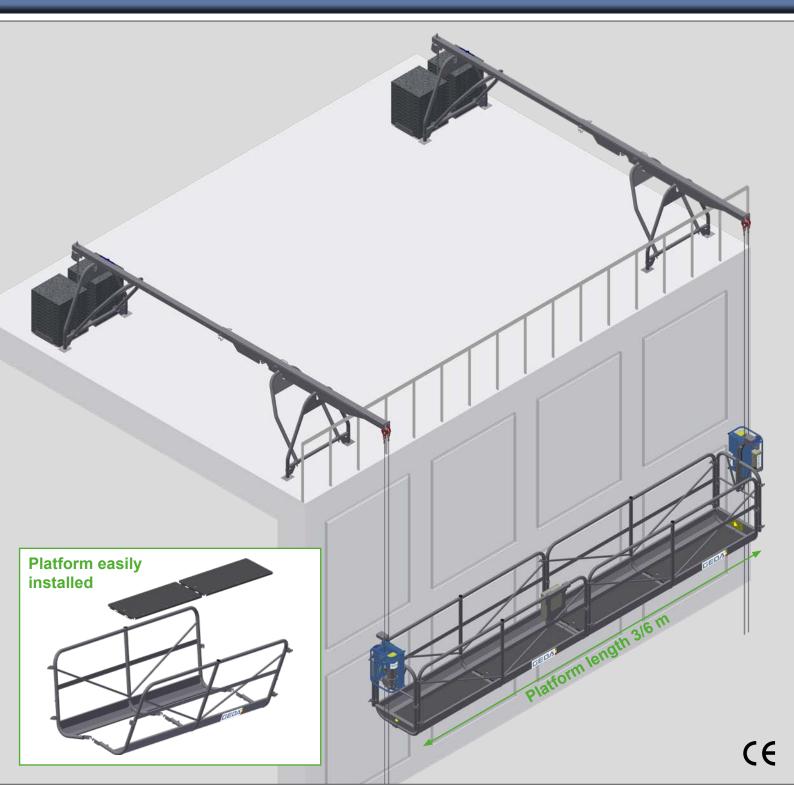

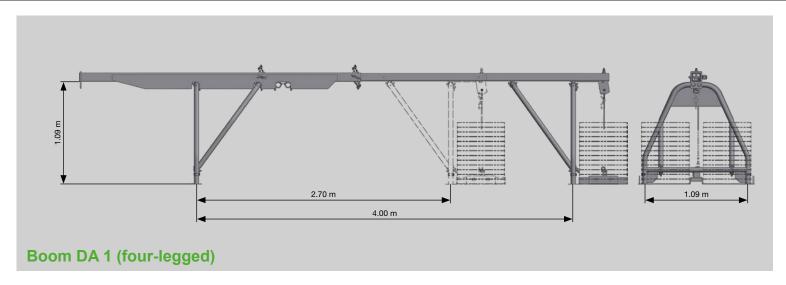

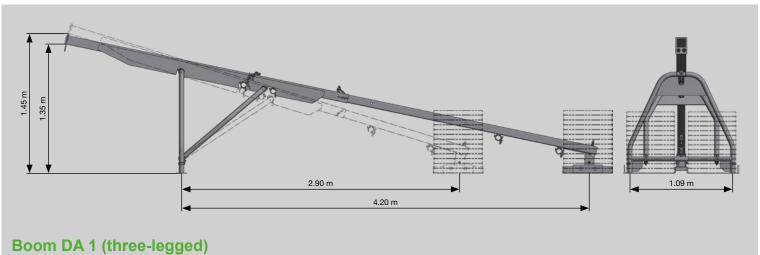

TECHNICAL DATA

Traction force	650 kp
Platform length	3/6 m
Lifting speed	8 m/min
Power supply	1.4 kW/400 V/50 Hz/16 A
Control voltage	48 VAC

Your GEDA-dealer:



GEDA-Dechentreiter GmbH & Co. KG

Mertinger Straße 60 86663 Asbach-Bäumenheim Phone +49 (0) 906 9809-0 Fax +49 (0) 906 9809-50 info@geda.de www.geda.de