Setting tool for blind rivets


Pneumatic-hydraulic | with permanent and intermittent extraction











The **HONSEL BZ 103A** has been one of the most popular standard tools for reliable blind riveting up to 5 mm rivet diameter for years.

Users particularly appreciate the very fast setting process and the outstanding ergonomics, as well as the low air consumption and reduced noise level.

As with all **HONSEL** tools, it is supplied **complete with all the necessary conversion parts.**Extraction of the rivet mandrel can be **individually and precisely adjusted** to suit the particular application.

We will be happy to advise you on custom solutions tailored to your specific application.





Reliable, robust, proven ten thousand times.


The air current holds the blind rivet securely in the nosepiece in any position before setting – one hand remains free to position the part.



Flat standard nosepieces with reduced dog point improve the setting behaviour and make the work process faster.



Family facts on the **HONSEL** pneumatic tools on page 65.

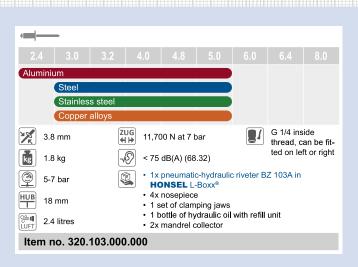



BZ 103 A





High-quality, durable plastic housing.



Multiple compressed air connections to ensure the right working position for right-handed and left-handed users at all times.



Integrated hanger bracket for working with balancer.







Very flat standard noepieces for optimum setting.



Cover cap for reliable blind rivet setting without collecting bin.



Large, sturdy collecting bottle for sheared blind rivet mandrels.

www.honsel.de 65