


METZNER SM 4000

TWIST-PROOF CUTTING TECHNOLOGY FOR SLOTTED CORRUGATED PIPES



Technical Data	SM 4000
Corrugated tube outer diameter min. ¹⁾	4,5 mm 0,18"
Corrugated tube inner diameter max. ¹⁾	40 mm 1,57"
Feeding speed max. ²⁾	160 m/min 525 ft/min
Electrical connection	230 V, 50/60 Hz, 1,5 A
Druckluft	6 bar
Drive	electro-pneumatic
Dimensions max. (LxWxH)	1215 x 1020 x 1435 mm
Weight	200 kg
Equipment	
Cutting system	Gear laser
Feeding system	Gear wheel
Interfaces for printing	optional
Interfaces for peripherals	✓
Interfaces for IT network	optional

¹⁾ depending on material | ²⁾ infinitely adjustable

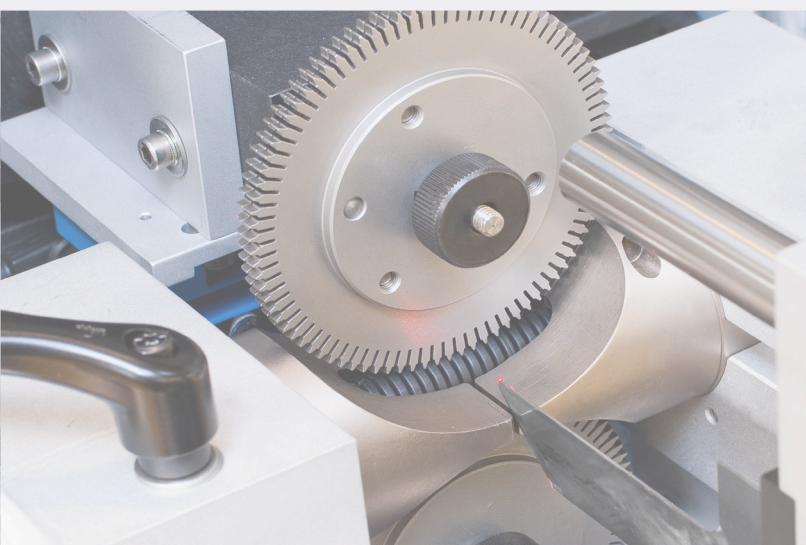

FEATURES

- For corrugated tubes from 4.5 mm to 40 mm diameter
- Patented Metzner „gearwheel laser system“ guarantees a form-fit and torsion-proof feed
- Laser sensor monitors the position of the gear wheels
- With gear wheel feed as standard