


# SMARTLINE

## Multifunctional corrosion- and welding-free column for indoor and outdoor use

- Aluminium Terminal for indoor and outdoor use - no corrosion possible.
- Robust design, industrial components for intensive use.
- Modular design.
- RAL colour of your choice and lettering possible on request.
- Lockable door with 3-point locking system.
- Flexibly installable electronics plates.
- Made in Belgium.

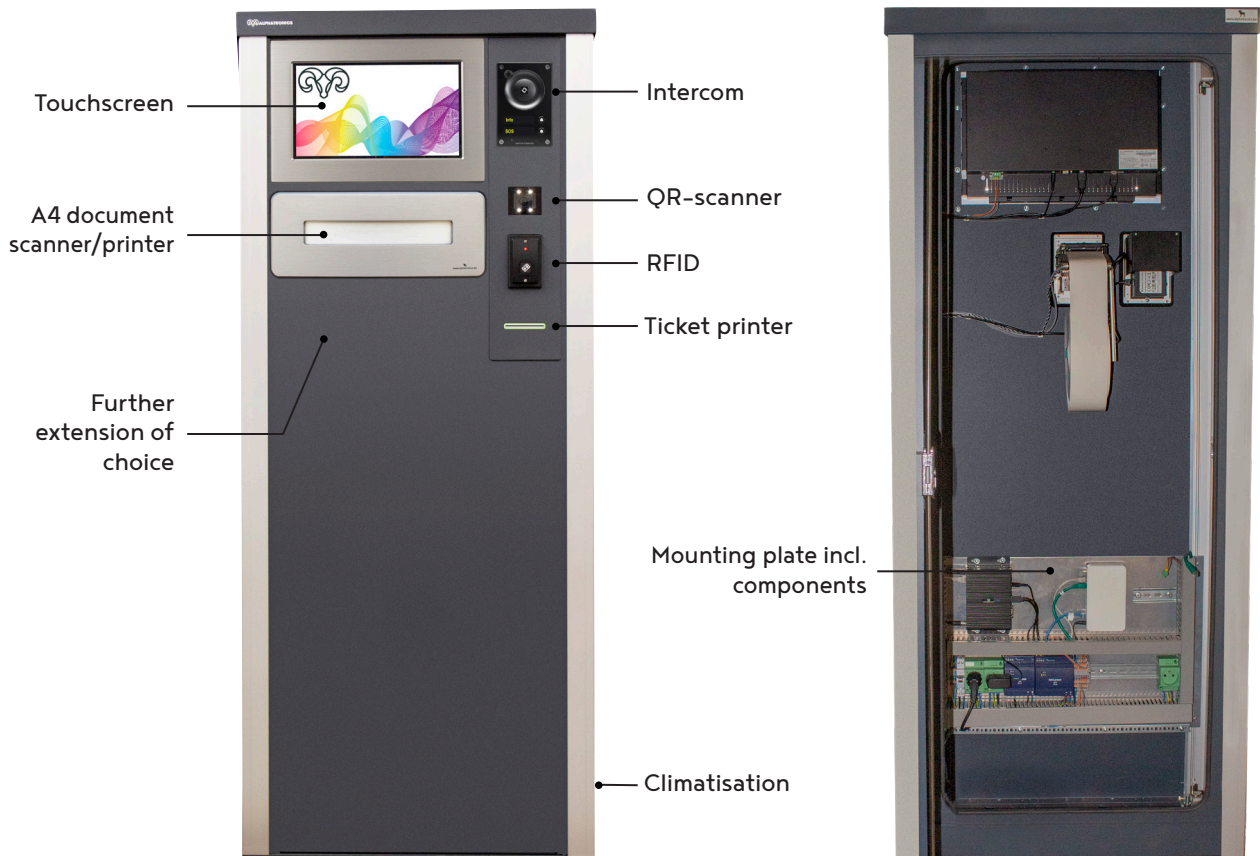


\* The image shown is an example, compose your own column

Heights	1,2 m	1,5m	1,8 m	2,4 m
<b>Housing dimensions - W x D x H</b>	W = 380 / 500 / 750 / 1000 x D = 330 x height (mm)			
<b>Installation depth</b>	324 mm			
<b>Side panels and roof</b>	Aluminium, RAL7016 powder coated varnish, 2 mm thick			
<b>Footplate</b>	Aluminium, RAL7016 powder coated varnish, 8 mm thick			
<b>Corner profiles</b>	Natural-coloured anodised aluminium Structured coating in RAL colour on request			
<b>Door</b>	Hinged and lockable rear door 3-point locking with integrated semi-profile euro cylinder lock			
<b>Mounting plate</b>	Included as standard - Height: 250 to 500 mm			
<b>Fixation on substrate</b>	Invisible fixing with wedge bolts or threaded rods			
<b>Weight</b>	+/- 32 kg	+/- 45 kg	+/- 57 kg	+/- 73 kg
<b>IP value</b>	IP 54			
<b>Warranty</b>	2 years			




## Dimensions


Operating column for cars (1,2 m - 1,5 m) · Pedestrians (1,8 m) · Trucks (2,4 m)

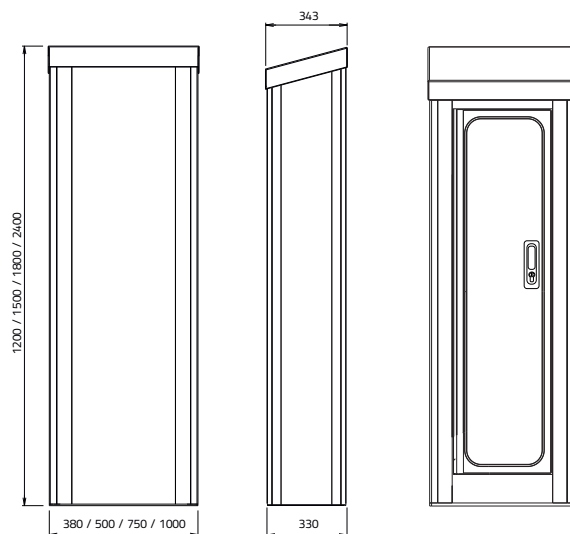

Which foundation for which column				
Width Column	380mm	500mm	750mm	1000mm
Footplate	<p>380 x 330mm</p>	<p>500 x 330mm</p>	<p>750 x 330mm</p>	<p>1000 x 330mm</p>
Concrete pedestal	<p>430x480x600mm</p>	<p>430x600x600mm</p>	<p>430x850x600mm</p>	<p>430x1100x600mm</p>

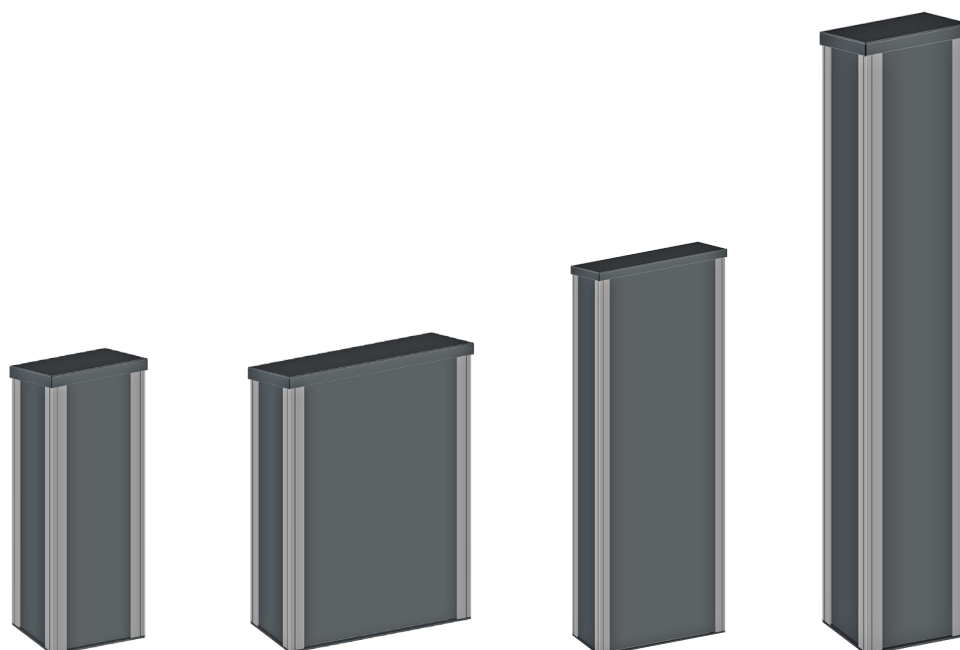

## Options
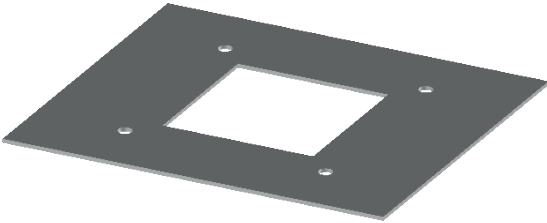
<p>Configure your SmartLine yourself</p>	<p>Possible standard extensions:</p> <ul style="list-style-type: none"> <li>- Touch screen 12", 15", 17"</li> <li>- Kiosk printer</li> <li>- Intercom</li> <li>- QR scanner</li> <li>- A4 document scanner</li> <li>- A4 laser printer</li> <li>- RFID reader</li> </ul> <p>- Apply your own devices</p>
	<p>Cabinet lighting Optional lighting to facilitate working inside the column</p> <ul style="list-style-type: none"> <li>- On/off switch</li> <li>- 24 V AC/DC ... 240 V AC/DC</li> <li>- Length: 350 mm</li> <li>- Protection class: IP20</li> </ul> <p>Article number: 4-030301-0006-000</p>
	<p>Wind influence protection Prevents the door to completely opening/ closing during operations</p> <p>Article number: 1-070700-0004-000-000-00</p>
	<p>Cable Shield By shielding the cables at the bottom of the pedestal, a clean finish is achieved. It also guarantees additional safety for third parties opening the pedestal</p> <p>Article numbers: 380 x 330 mm: 1-070700-0005-000-000-00 500 x 330 mm: 1-070700-0006-000-000-00 750 x 330 mm: 1-070700-0007-000-000-00 1000 x 330 mm: 1-070700-0008-000-000-00</p>
	<p>Foundation mould Save time on installation by installing a foundation template</p> <p>Article numbers: 380 x 330 mm: 2-070700-0004-000-000-10 500 x 330 mm: 2-070700-0005-000-000-10 750 x 330 mm: 2-070700-0006-000-000-10 1000 x 330 mm: 2-070700-0007-000-000-10</p>
	<p>Additional mounting plate Fit an additional mounting plate to mount third-party equipment</p> <p>Article number: 1-070700-0009-000-000-00</p>