

Name:

PolySeal Vario PN

Description:



Semiautomatic sealing device for sealing of all sorts of plastic and glass containers

Equipment features

- pneumatic drive
- stepless pressure regulation
- sealing head heating block, swingable, anodised aluminium
- hollowed out sealing die, adaptable to sealing head
- heat protection shield
- stabiliser
- roller guide with running slide
- container holder
- VARIOTRONIC - regulation of temperature, sealing time and pressure
- modularly upgradeable to the PolySeal Vario Twin

Technical data

electrical power supply	230 V, 50/60 Hz
sealing head heating block	100x100x25 mm
nominal current	5 A
power consumption	1 kW
compressed air (conditioned)	1-5 bar
air consumption	0.8 m ³ /h
sealing capacity	approx. 600 uph
variable height adjustment	0-240 mm
temperature setting	100-300 °C
sealing time (cycle)	0.3-9.9 s
container size (height/outerØ/mouthØ)	max. 220/180/160 mm
Festo ISO cylinder	D = 50 mm
cylinder stroke	25 mm
weight	39 kg
dimensions (WxLxH)	330x570x740 mm

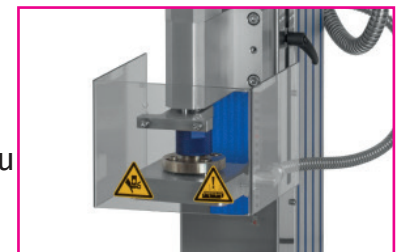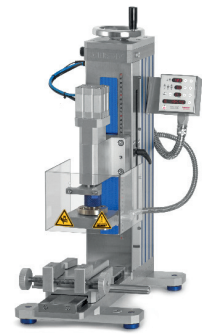

sealing head with heat protection shield



VARIOTRONIC temperature controller



handwheel for height adjustment

EC Declaration of Conformity in accordance with EC Directive (Machinery Directive) 2006/42/EC,

Your sealing system from one source!

Aluminium seals from BALLERSTAEDT - suitable for your application.

Please contact us.

The information contained here is purely informative and non-binding.

Nr. 43451-E, Version: 3 - Datum/Ersteller: 14.07.2020/SL

Letzte Änderung: 22.01.2021/SL - Datum/Freigeber: 22.01.2021/HK

BALLERSTAEDT & CO. OHG

Hardbergstr. 11 • D-76437 Rastatt

www.ballerstaedt.de

Phone: +49 (0)7222/9515-0

E-Mail: sales@ballerstaedt.de