

GEDA®
MULTILIFT P22



GEDA®
ORIGINAL



- ▷ Innovations
- ▷ Know-how
- ▷ Up-to-date production technologies



GEDA®
ORIGINAL



GEDA®
World-wide competence



GEDA®
MULTILIFT P22



Depending on structural conditions, you can choose between high and low landing level safety gates to ensure safe loading and unloading at landing levels.

Your GEDA-Dealer:

GEDA®
ORIGINAL

**GEDA-Dechentreiter
GmbH & Co. KG**


Mertinger Straße 60
86663 Asbach-Bäumenheim
Phone +49 (0) 906 9809-0
Fax +49 (0) 906 9809-50
info@geda.de
www.geda.de

GEDA®
MULTILIFT P22

Personnel and material hoist

Platform:

Landing level safety gate

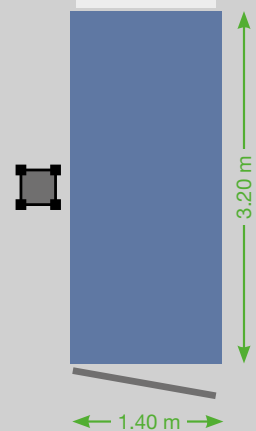

Optional: C-Door 2.9 x 2.0 m (WxH)




MULTILIFT P22

Load capacity	
Persons	22 persons
Material	2000 kg
Lifting height	200 m
Lifting speed	0-54 m/min
Power supply	30 kW/380-480 V/50-60 Hz/63 A



The GEDA Multilift P22 puts every advantage at your disposal:

- ▶ **Compact, pre-installed base unit comprising: car, base enclosure, flat cable bin and drive ❶**
- ▶ **No foundations necessary**
- ▶ **Modular system**
- ▶ **Low and easy access height with and without a cable trolley**

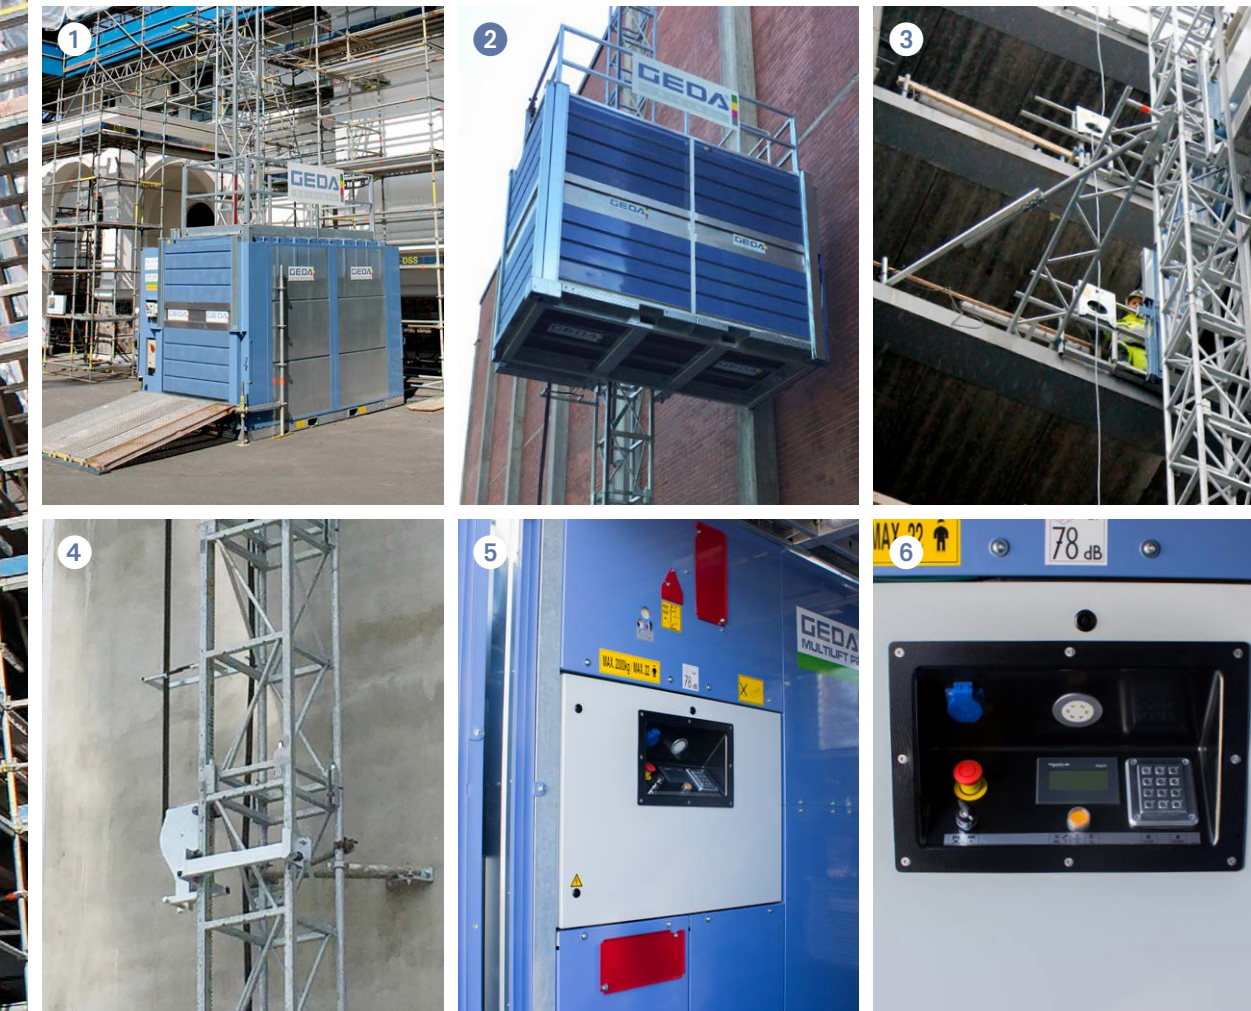

- ❶ Compact, pre-installed base unit.
- ❷ Optional: Big C-door, 2.9 x 2.0 m (WxH) for easy loading of big and bulky goods.
- ❸ Innovative mast system with captive screws: High lifting height and easy anchoring through use of the scaffolding pipe system (Ø 48 mm).
- ❹ The GEDA MULTILIFT P22 is operated with a cable trolley above a lifting height of 50 m. This does not impair the easy access height of 450 mm.
- ❺ Maintenance-friendly design: All electronic components are directly accessible from the platform.
- ❻ Optional: Intelligent call control. This makes operation even easier and more efficient (short waiting times on the construction site).