
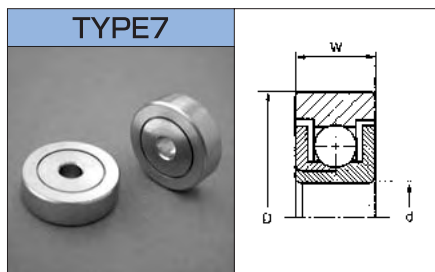
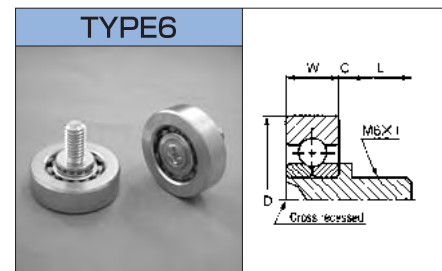
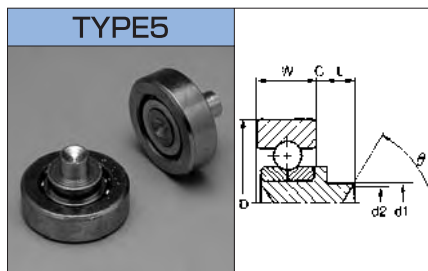
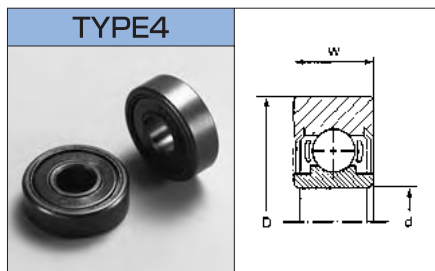
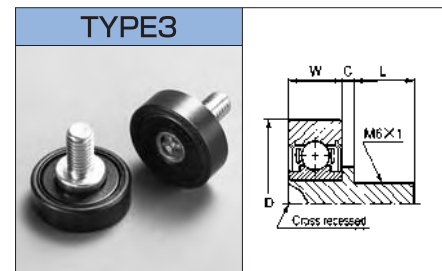
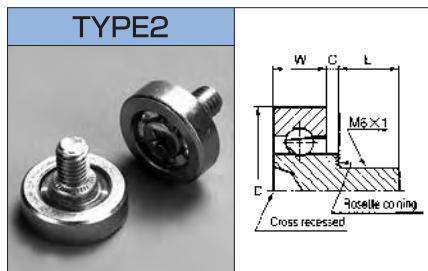


A-SERIES BEARINGS

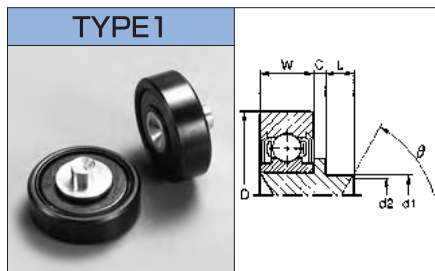

Code	Part No.	D ^{±0.1} [mm]	d ^{+0.1} ₀ [mm]	d1 _{-0.1} [mm]	W ^{±0.2} [mm]	C ^{±0.4} [mm]	L ^{±0.2} [mm]	(d2 × θ) ^{*1}	Load ^{*2} [N] (kgf)	Type	Q'ty [pcs/box]	Gross Weight [kg/box]
230050	A-22-AH1-3.4	22	—	5	7	1	3.4	φ4.5×110°	784 (80)	1	1,000	16.2
230203	A-19-B1	19	—	—	6	1	8 ^{±0.5}	—	490 (50)	2	1,000	12.1
230204	A-19-B2	19	—	—	6	2	8 ^{±0.5}	—	490 (50)	2	1,000	12.7
230207	A-19-B2.7	19	—	—	6	2.7	8 ^{±0.5}	—	490 (50)	2	1,000	12.8
230251	A-22-BH2.8-11	22	—	—	7	2.8	11 ^{±0.5}	—	784 (80)	3	1,000	18.0
800000	A-608ZZ-5	22	8	—	7	—	—	—	784 (80)	4	1,000	10.8
231010	AS-19-A0.5-5	19 ^{±0.05}	—	5	6 ^{±0.1}	0.5 ^{±0.3}	5	φ4.5×100~130°	490 (50)	5	1,000	19.0
231050	AS-22-A1.5	22	—	6	8	1.5	3.5	φ5.5×90°	686 (70)	5	1,000	18.0
231052	AS-22-A1.5-5.5	22	—	6	8	1.5	5.5	φ5 ×110°	686 (70)	5	1,000	20.1
231150	AS-26-A1.5	26	—	6	8	1.5	3.5	φ5.5×90°	686 (70)	5	800	23.2
231203	AS-22-B0.5-9.5	22	—	—	8	0.5	9.5 ^{±0.5}	—	686 (70)	6	1,000	19.9
231204	AS-22-B2-11	22	—	—	8	2	11 ^{±0.5}	—	686 (70)	6	1,000	21.5
231250	AS-24-B0.5-9.5	24	—	—	8	0.5	9.5 ^{±0.5}	—	686 (70)	6	500	12.3
231300	AS-26-B2-11	26	—	—	8	2	11 ^{±0.5}	—	686 (70)	6	500	15.5
231402	AS-608ZZ-2	22	8	—	7	—	—	—	294 (30)	7	500	7.6
231405	AS-26-H6	26	6	—	8 ^{±0.3}	—	—	—	294 (30)	7	800	27.8

*1 Reference Dimension

*2 Allowable Load at 300min⁻¹ (300r.p.m.)

Size limits can be modified for practical applications. Please contact our sales/engineering departments for further information and assistance.

TOK BEARING CO.,LTD.

HEAD OFFICE, TOKYO, JAPAN – TEL : 81-3-3969-1534 FAX : 81-3-3969-9354
EMAIL : overseas@tok-bearing.co.jp

Product specification are subject to change without prior notice.

Before assembly or use of any bearing, please read "Caution for Use"