



The Trusted Metal Conveyor Belt Manufacturer



PEEK Typical Properties:


	Units	PEEK
Tensile strength	psi	14,500
Heat deflection temperature @ 264 psi	°C	152
Maximum continuous service temperature in air	°C	240
Melting point	°C	343

Longer lasting PEEK Drive Components high performance

Introducing our new line of PEEK drive components. PEEK is an abbreviation for PolyEtherEther-Ketone, a high performance engineered thermoplastic that can operate at high temperatures and is less abrasive on your stainless steel belts than metal drive components. PEEK can be used continuously to 240°C and in hot water or steam without permanent loss in physical properties. Available for all Flat-Flex®, Versa-Link™, and Compact-Grid™ drive components including: gears, blanks and end rollers.

- Enhanced strength
- Excellent wear characteristics
- Less abrasive to stainless steel belts
- Can be used continuously to 240°C
- Outstanding chemical resistance
- Excellent mechanical properties
- Resistant to hot water and steam
- FDA compliant for food contact applications

Case Study: A customer using polyacetal plastic end rollers replaced them every 6 weeks due to wear. They switched to Wire Belt's PEEK end rollers and are now getting 30 weeks of life, that's 5 times greater life! Bottom line, PEEK saves in TCO.

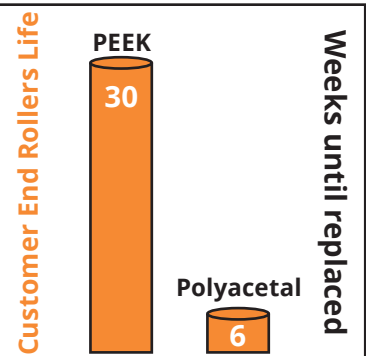

Wire Belt Company Limited
 Castle Road, Eurolink Industrial Centre
 Sittingbourne, Kent ME10 3RF, England
 Tel: +44 (0) 1795 421771 | Fax: +44 (0) 1795 428905
 Email: sales@wirebelt.co.uk

www.wirebelt.co.uk