





Ball transfer units with steel plate housings

- KR-B = galvanized steel plate housing with steel ball
- KR-B-VA = galvanized steel plate housing with stainless steel ball
- KR-BVA = all parts from stainless steel
- KR-B-KU = galvanized housing with plastic ball
- all load-carrying capacity specifications are valid for use with an upright ball
- the load capacity decreases for overhead installations

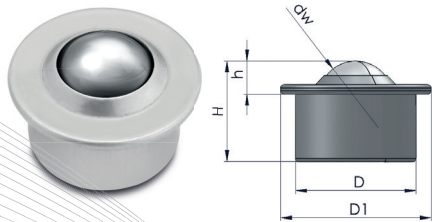

ball transfer series KR-B	dw mm	D mm	D1 mm	H mm	h mm	load-carrying capacity kg
KR-B-15 Ident No.: 0017480	15.8	24	31	21	9.5	60
KR-B-22 Ident No.: 0017490	22.2	36	45	30	9.8	160
KR-B-30 Ident No.: 0017499	30	45	55	37	13.8	300
KR-B-45 Ident No.: 0017510	44.5	62	75	53.5	19	610
KR-B-15-VA Ident No.: 0017482	15.8	24	31	21	9.5	60
KR-B-22-VA Ident No.: 0017492	22.2	36	45	30	9.8	160
KR-B-30-VA Ident No.: 0017501	30	45	55	37	13.8	300
KR-B-45-VA Ident No.: 0017512	44.5	62	75	53.5	19	610
KR-BVA-15 Ident No.: 0017487	15.8	24	31	21	9.5	38
KR-BVA-22 Ident No.: 0017496	22.2	36	45	30	9.8	100
KR-BVA-30 Ident No.: 0017508	30	45	55	37	13.8	200

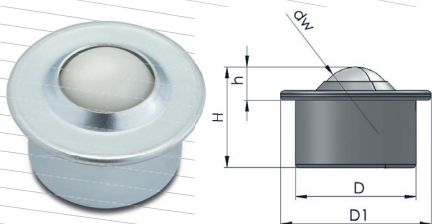

ball transfer series KR-B-KU	dw mm	D mm	D1 mm	H mm	h mm	load-carrying capacity kg
KR-B-15-KU Ident No.: 0017483	15.8	24	31	21	9.5	10
KR-B-22-KU Ident No.: 0017493	22.2	36	45	30	9.8	20
KR-B-30-KU Ident No.: 0017502	30	45	55	37	13.8	25