



231 / 400 V - 50 Hz & 277 / 480 V - 60 Hz





GENERATOR GENERAL INFORMATION

GENERATOR	FREQUENCY	VOLTAGE	POWER FACTOR	SPEED	DIESEL	ENGINE		ALTERN	ATOR		TYPE OF	GENER		DUTPUT
Model	Hz	V	Cos Q	Rpm	Brand	Model	Series	Brand	Model	Series	Operation	kVA	kW	А
							G125JC GII	Ľ			Standby	100,0	80,0	144,5
JCN 100	50	231/400	0.8	1500		JCN G125JC				225M2	Prime	90,9	72,7	131,4
								ENERG			Continuous	63,6	50,9	92,0
					JCN				JCB		Standby	100,0	80,0	144,5
JCN 100	60	277/480	0.8	1800				ធ្វ័		225M1	Prime	90,9	72,7	131,4
								· ~ °			Continuous	63,6	50,9	92,0

 Diesel Engines with Advanced Technology and Quality Alternators with Advanced Technology and Quality Low Exhaust Emission Control Panel Suitable for Flexible Application Patented Compact Designed and Sound proof Canopy 	 Tropical 50 °C Radiator, First Class Product Support Fuel Filter with Water and Particle Separator Low Fuel Consumption, Low Oil Consumption Global Technical Service and Maintenance Support Wide Range of Affordable Spare Parts
 Patented Compact Designed and Sound proof Canopy Low Operating Cost, Suitable for Heavy-Duty 	 Wide Range of Affordable Spare Parts High Quality and Reliable Technology
Durability, Low Noise Level	Half Century Experience in Generator Manufacturing

STAND BY POWER RATING – (ESP):

ESP is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Stand by Power rating. This rating should be applied where reliable utility power is available. A Stand By rated engine should be sized for a maximum of an 70% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Stand by Power rating. Stand By ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

PRIME POWER RATING – (PRP):

Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

UNLIMITED TIME RUNNING PRIME POWER (ULTP):

PRP (Prime Power) is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

LIMITED TIME RUNNING PRIME POWER (LTP):

LTP (Limited Time Prime Power) is available for a limited number of hours in a no variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation

CONTINUOUS POWER RATING (COP):

COP is the power that the engine can continue to use under the prescribed speed and the specified environment condition in the normal maintenance period stipulated in the manufacturing plant. And Continuous Power is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



PAY ATTENTION TO THE POINTS BELOW IN PICKING AND USING THE GENERATOR

* Generators can work on Continuous Power at 70% of Prime power value if only all maintenances are done on time with original spare parts and high-quality oils that manufacturer advice.

* Generators should not operate below 50% of Prime Power value. In such a case, the engine will burn excessive oil and eventually have irreparable damage.

* If your need is 1000 kVA or above, you should prefer Synchronic Systems with 2-3 generators with failure back up and simultaneous aging.

* These points will provide advantage for you with purchasing and operating the generator.

GENERATOR DIMENSIONS AND TECHNICAL DRAWINGS






VALUES		OPEN TYPE GENERATOR	CANOPY TYPE GENERATOR
WIDTH	mm	700	1000
LENGTH	mm	1900	3000
HEIGHT	mm	1562	1380
WEIGHT (NET)	Kg	1024	1200
FUEL TANK CAPACITY	L	161	223

SYMBOL	OPEN	CANOPY
L	2250	3000
W	800	1000
н	1600	1500
S	-	80
Α	620	
В	720	
С	755	
D1		600
D2		600
D3		600
D4		600
D5		600

ENE



FUEL CONSUMPTION

PERCENT OF PRIME POWER	1500 rpm	1800 rpm
	l/hr	I/hr
110 %	22,31	22,31
100 %	20,20	20,20
75 %	15,53	15,53
50 %	10,20	10,20



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



DIESEL ENGINE MAIN TECHNICAL PARAMETERS

GENERAL		
Number of Cylinders		4
Configuration		Vertical, In Line
Aspiration		Turbocharged
Combustion System		Direct Injection
Compression Ratio		17.3:1
Bore	mm	105
Stroke	mm	124
Displacement	L	4,3
Governing Type		Electronic
Governing Class		G3
Rotation		Counterclockwise
Firing Order		1-3-4-2
Emission		Tier II
Moments of Rotation Inertia		
Engine	Kg - m²	1,68
Flywheel	Kg - m²	1,21
Performance Rating	5	
Speed Droop	%	≤0,5
Steady State Speed Band	%	≤0,5
FILTERS		
Air Filter		Dry Type, Replaceable
Fuel Filter		With Water Separator
Oil Filter		Element Type, Particulate Trap
FLYWHEEL HOUSING AND FLEX COUPLING		
Flywheel Housing	SAE (J620)	3
Flex Coupling Disc	Inch (")	11,5
TEST CONDITIONS		
Ambient Temperature	%	25
Atmospheric Pressure	КРа	100
Relative Humidity	Rh (%)	30
Max. Operating Intake Resistance	КРа	5
Exhaust Backpressure Limit	КРа	10
Fuel Temperature (Fuel Inlet Pump)	°C	38±2
OVERALL DIMENSIONS		
Length*	mm	1388
Width	mm	780 1000
Height Dry Weight	mm kg	430
*From front end of radiator to near end of air filter	۳B	
FAN		
Diameter	mm	500
Drive Ratio		1,9:1
Number of Blades Material		7 Plastic
Туре		Blowing
7 C -		



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



DIESEL ENGINE MAIN TECHNICAL PARAMETERS

COOLING SYSTEM			
Radiator Type	50ºC	Tropical	
Total Coolant Capacity	L	30	
Max. Perm. Coolant Outlet Temperature	ōC	103	
Max. Perm. Flow Resist. (Cool. System And Piping)	bar	0,5	
Max. Temperature of Coolant Warning	°C	95	
Max. Temperature of Coolant Shutdown	⁰C	98	
Thermostat Operation Temperature - Initial Open	⁰C	72	
Thermostat Operation Temperature - Full Open	°C	80	
Delivery of Coolant Pump	m ³/ h	2,48	
Min. Pressure Before Coolant Pump	bar	0,15	
Radiator Face Area	m²	0,31	
Rows	Row	3	
Matrix Density	Per / Inch	15,5	
Material		Aluminum	
Width of Matrix	mm	530	
Height of Matrix	mm	590	
Pressure Cap Setting	kPa	90	
Estimated Cooling Air Flow Reserve	kPa	0,125	
Engine Pre Heater-Tube (with Circulation Pump)	W	1500	
LUBRICATION SYSTEM			
Total System	L	13	
Minimum Oil Level	L	11	
Nominal Motor Operating Temperature	⁰C	40	
Lubricating Oil Pressure (Rated Speed)	bar	5	
Relief Valve Opens	kPa	250-400	
Oil / Fuel Consumption Ratio	%	≤1,63	
Normal Oil Temperature	°C	120	
ELECTRICAL SYSTEM			
Voltage	V	12	
Starter	kW	4,2	
Alternator Output Ampers	А	42	
Alternator Output Voltage	V	14	
Batteries Capacity	Ah	85	



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



JCB ENERGY DIESEL ENGINE POWER RATINGS

ENGINE MODEL	G125JC		ENGINE FAMILY	JC18	ENGINE SERIES	GII	
Speed (Rpm)		TYPICAL GENERATOR OUTPUT (NET)		ENGINE POWER	1		
	Type of Operation			Gro	oss	Net	
		kVA	kWe	KWm	Нр	kWm	Нр
1500	Stand By(Maximum)	100,7	80,6	94,0	126,2	90,0	102,8
	Prime	90,6	72,5	85,0	114,1	81,0	108,7
1000	Stand By(Maximum)	100,7	80,6	94,0	126,2	90,0	102,8
1800	Prime	90,6	72,5	85,0	114,1	81,0	108,7

DIESEL ENGINE MATCHING PARAMETERS - 50 HZ

E0 H7 @ 1E00 D/MIN			PRIME
50 HZ @ 1500 R/MIN		STAND BY	
Gross Engine Power	kW	95,0	86,0
Net Engine Power	kW	91,0	82,0
Fan Power Consumption (Belt Pulley Driven)	kW	2,2	2,2
Other Power Loss	kW	2,3	2,3
Mean Effective Pressure	MPa	1,67	1,51
Intake Air Flow	m ³ / min	7,22	7,22
Exhaust Temperature Limit	°C	580	528
Exhaust Flow	m ³/ min	21,17	19,25
Boost Pressure Ratio		6,40	6,10
Mean Piston Speed	m / s	6,5	6,5
Cooling Fan Air Flow	m ³/ min	149,0	149,0
Typical Generator Output Power	kVA	101	91
	KVA	101	51
HEAT REJECTION	NVA.	STAND BY	PRIME
	kW		
HEAT REJECTION		STAND BY	PRIME
HEAT REJECTION Energy in Fuel (Heat of Combustion)	kW	STAND BY 244,0	PRIME 220,0
HEAT REJECTION Energy in Fuel (Heat of Combustion) Gross Heat to Power	kW kW	STAND BY 244,0 94,0	PRIME 220,0 85,0
HEAT REJECTION Energy in Fuel (Heat of Combustion) Gross Heat to Power Energy to Coolant and Lubricating Oil	kW kW kW	STAND BY 244,0 94,0 66,3	PRIME 220,0 85,0 59,7
HEAT REJECTIONEnergy in Fuel (Heat of Combustion)Gross Heat to PowerEnergy to Coolant and Lubricating OilHeat Dissipation Capacity *	kW kW kW kW	STAND BY 244,0 94,0 66,3 -	PRIME 220,0 85,0 59,7 -



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



DIESEL ENGINE MATCHING PARAMETERS - 60 HZ

60 HZ @ 1800 R/MIN		STAND BY	PRIME
Gross Engine Power	kW	95,0	86,0
Net Engine Power	kW	91,0	82,0
Fan Power Consumption (Belt Pulley Driven)	kW	2,2	2,2
Other Power Loss	kW	2,3	2,3
Mean Effective Pressure	MPa	1,49	1,36
Intake Air Flow	m ³ / min	7,73	7,73
Exhaust Temperature Limit	ōC	621	570
Exhaust Flow	m ³ / min	22,65	20,70
Boost Pressure Ratio		6,90	6,70
Mean Piston Speed	m / s	7,8	7,8
Cooling Fan Air Flow	m ³ / min	159,0	159,0
Typical Generator Output Power	kVA	101	91
HEAT REJECTION		STAND BY	PRIME
Energy in Fuel (Heat of Combustion)	kW	261,2	233,1
Gross Heat to Power	kW	100,6	87,8
Energy to Coolant and Lubricating Oil	kW	70,9	64,2
Heat Dissipation Capacity *	kW	0,0	0,0
Energy to Exhaust	kW	82,2	74,4
Heat to Radiation	kW	7,5	6,8
*Intake Intercooled system			

JCB ALTERNATOR TECHNICAL PARAMETERS AND SPECIFICATIONS



ALTERNATOR TECHN	ICAL PARAMETERS				
Insulation Class		Н	Field Control System		Self-Excited
Winding Pitch		2/3 - (N° 6)	A.V.R. Model	Standard	SX460
Wires		12	Voltage Regulation	%	± 1
Protection		IP 23	Sustained Short-Circuit Current	10 sec	300% (3 IN)
Altitude	m	1000	Total Harmonic (*) TGH / THC	%	< 5
Overspeed	rpm	2250	Wave Form: NEMA = TIF - (*)		< 50
Air Flow	m³/sec.	0.216	Wave Form: I.E.C. = THF - (*)	%	< 2
Bearing Drive	N/A	-	Bearing Non-Drive	Bearing	6309-2RZ
Rotor Winding	100%	Copper	Stator Winding	100%	Copper



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



ALTERNATOR SPECIFICATIONS

50 HZ / 231-400V COSQ 0,8 / 1500 RPM

STANDARD USING ALTERNATOR				OPTIONAL USING ALTERNATOR					
BRAND/MODEL	JCBENERGY	JCB 225M2		LEROY-SO	OMER	TAL044C	STAMFORD	UC27	′4C
DUTY				Continuous				Stand By	
AMBIENT	C°			40°C				27°C	
CLASS / TEMP. RISE	C°			H/ 125° K				Н/ 163° К	
SERIES STAR	V	380/220	400/231	415/240	1 Phase	380/220	400/231	415/240	1 Phase
PARALLEL STAR	V	190/110	200/115	208/120	220	190/110	200/115	208/120	220
SERIES DELTA	V	220	230	240	230	220	230	240	230
OUTPUT POWER	kVA	91,0	91,0	94,0	-	100,0	100,0	103,8	-
OUTPUT POWER	kW	72,8	72,8	75,2	-	80,0	80,0	82,4	-

60 HZ / 277-480V COSQ 0,8 / 1800 RPM

STANDARD USING ALTERNATOR			OPTIONAL USING ALTERNATOR						
BRAND/MODEL	JEBENERGY	JCB 225M1		LEROY-S	SOMER TA	L044A	STAMFO	ORD	UC224F
DUTY				Continuous				Stand By	
AMBIENT	C°			40°C				27°C	
CLASS / TEMP. RISE	C°			Н / 125° К				H / 163° K	
SERIES STAR	V	416/240	440/254	480/277	1 Phase	416/240	440/254	480/277	1 Phase
PARALLEL STAR	V	208/120	220/127	240/138	-	208/120	220/127	240/138	-
SERIES DELTA	V	240	254	277	240	240	254	277	240
OUTPUT POWER	kVA	83,0	87,0	92,0	-	91,0	96,0	101,0	-
OUTPUT POWER	kW	66,4	69,6	73,6	-	72,8	76,8	80,8	-



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



CONTROL MODULE ALERTS

Emergency Stop Malfunction High Generator Frequency Low Generator frequency, Low Load Over Current, Unbalanced Current Low Generator Voltage High generator Frequency Phase sequence error Overload, Heat Sensor Broken Low Water Level (Optional) Low Oil Pressure, Reverse Power Low Water Temperature

BENERG

Start Error, Stop Error Magnetic Pickup Error Charge Alternator Error Unbalanced Load Maintenance Time Alarm Low Speed, High Speed Broken Oil Sensor Cable High Oil Temperature (Optional) Low Fuel Level (Optional), High Battery Voltage Low Battery Voltage, High Water Temperature Electronic Can bus Errors (ECU)



- Powder Painted Steel Panel with Lockable Door
- ATS (Automatic Transfer Panel)-Optional
- o Control Module
- Battery Charger
- Emergency Stop Button
- Terminal Blocks
 Load Output Terminal
 System Protection MSE
- Ginevit Breaker Ontional
- LCD Screen
- Control Relays
- o Backlit, 128x64 Pixel

CONTROL MODULE TECHNICAL PARAMETERS

CONTROL PANEL SPECIFICATIONS

Brand	JCBENERGY	Brand	Trans-MIDIAMF.232.GP
Dimensions	120mmx94mm.	Protection Class	IP65 From the Front
Weight	260 gr.	Environmental Conditions	2000 meters above sea level
Ambient Humidity	Max. %90.	Ambient Temperature	-20°C to +70°C
DC Battery Supply Voltage	8 - 32 V	Battery Voltage Measurement	8 – 32 V
Network Frequency	5 - 99,9 Hz	Mains Voltage Measurement	3 - 300 V phase -Neutral, 5 - 99,9 Hz
Generator Voltage Measurement	3 - 300 V	Generator Frequency	5 - 99,9 Hz
Current Transformer Secondary	5A	Working Period	Continuous
Charge Alternator Voltage Measurement	8 - 32 V	Charge Alternator Excitation	210mA &12V, 105mA &24V Nominal 2.5W
Communication Interface	RS-232	Analog Sender Measurement	0 - 1300ohm
Generator Contactor Relay Output	5A & 250V	Mains Contactor Relay Output	5A & 250V
Solenoid Transistor Outputs	1A with DC Supply	Start Transistor Outputs	1A with DC Supply
Configurable-3 Transistor Outputs	1A with DC Supply	Configurable-4 Transistor Outputs	1A with DC Supply



231 / 400 V – 50 Hz & 277 / 480 V – 60 Hz



CONTROL MODULE FUNCTION

Mains Voltage Level Control	Generator Voltage Level Control	3 Phase Generator Protections	3 Phase AMF Function	Alarm Horn
Network Frequency Level Control	Generator Frequency level Control	- High / Low Voltage	- High / Low Frequency	Heater Tube Thermostat Control
Engine Operating Option Control	Generator Current Level Control	- High / Low Frequency	- High / Low Voltage	Modbus and SNMP
Engine Stop Option Control	Generator Powder Level Control	 Current / Voltage Asymmetry 	- High / Low Water Temperature	Working Hour
Engine Speed (RPM) Level Control	Generator work Schedule and Timing Control	- Overcurrent / Overload	- High / Low Load	Ground Leakage
Battery Voltage Options Times	Oil Pressure Controllers Control	Overheat Control	Mains., Generator ATS Control	Analog Modem
Check Engine Maintenance Times	Configurable Analog Inputs and Outputs	1 Phase or 3 Phase, Phase Selection	Network, Voltage, Frequency Display	Ethernet, USB, RS232, RS485
Communication Interfaces GPRS, GSM	Keeping Error Records of Past Events	Parameter Setting via Control Module	Parameter Setting via Computer	Selectable Protection Alarm / Shutdown
Engine Speed, Voltage, Earning	Configurable Programmable Digital Inputs and Outputs	Water Temperature Current and Frequency	Hours of Operation Phase sequence	Battery Voltage Oil Pressure

SOUND PROOF CANOPY AND BASE FRAME (CHASIS) SPECIFICATIONS




- Special, Registered JCB Energy Design and Colour
- A1 Quality DKP / HRU / Galvanized Steel
- Sensitive Twist on Automatic Press Brake
- Delicate Cut on Automatic Punch and Laser Bench
- Sensitive Welding on Robotic Welding Bench
- Chemical Cleaning Nano Technology Before Painting
- Robotic Painting with Electrostatic Powder Paint
- Drying and stabilizing on 200 °C Ovens
- o 1500 Hour Salt Test
- Glass wool Isolation, A1 Class Material -50/+500 ºC
- Special Covering Over Glass Wool
- Best Sound Level (in Dba)
- Temperature Tests
- Rustproof Accessories

- Cable Exit Connectors and Glands
- Emergency Stop Button
- Fuel Level Gauge
- Fuel Drain Cap
- Fuel Inlet and Return Records
- I permeability Test for Fuel Tank
- Vacuumed Rubber Mounted
- High Quality weatherstrips
- High Quality Shock Absorbers
- Fuel Filling Cap (with ventilation)
- Lifting and Carrying Equipment
- Internal Exhaust Mufflers (Silencers)
- External Exhaust Mufflers (Silencers)
- Radiator water Filling Cap
- Daily Fuel Tank, External Fuel Tank

Our Quality Certificates

Certificate of I	Registration 🔊	Certificate of Registration 👝			
This is to certify that the Quality I	Management System of	This is to certify that the Environmental Management System of			
JEBENE	RGY	JEBENERGY			
JCB ENERGY ELECTRIC	POWER INDUSTRY	JCB ENERGY ELECTRIC POWER INDUSTRY			
CALLE DE TRESPADERNE, NUW 7 PLANTA 3, PUE	RTA C 28042 MADRID - (MADRID), SPAIN	CALLE DE TRESPADERNE, NUM 7 PLANTA 3, PUERTA C 28042 MADRID - (MADRID), SPAN			
is in accordance with the requireme	nts of the following standard	is in accordance with the requirements of the following standard			
ISO 9001 (Quality Managem		ISO 14001:2015 (Environmental Management System)			
SCOP	E	SCOPE			
MANUFACTURING, SALES AND SERVICE OF GENS WATER PUMP, FORKLIFT, UPS, REGULATOR, CO		MANUFACTURING, SALES AND SERVICE OF GENERAT WATER PUMP, FORKLIFT, UPS, REGULATOR, CONVE			
(IAF Code: 1	u.m	(AF Code: 18,19)			
tah Number 2002201342 verify contificate, visit_at : overscent.com ps_thatmacreatiliter.org ps_thatmacreatiliter.com	Initial Registration Data : 15-001-2020 11 Survivillance Data : 15-366-2020 21 Survaillance Data : 25-366-2020 Certificate Euroy Data : 26-00-2020	Centrol Numor: 399024031 To vecify continuate, visit, at : very an Section of https://www.identicereditation.org	intel Registration Date : 25-04-0428 17. Surveillance Date : 25-54-0428 27. Surveillance Date : 25-54-0428 Confectio Euply Date : 24-04-0428		
as www.incenteration.org	Issued by ARS Assessment Private Limited		Issued by APS Assessment Printle United		



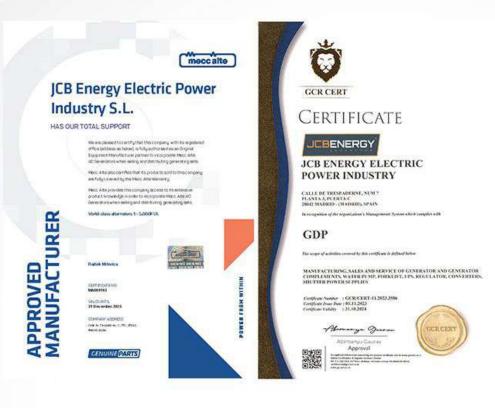



JEBENERGY

JCB ENERGY ELECTRIC POWER INDUSTRY

CALLE DE TRESPADERNE, NUM? PLANTA 3, PUERTA C 28642 MADRED - (MADRED, NPAEN

million of the organization's Management System which complex with

1SO 22716:2013:GMP GOOD MANUFACTURING PRACTICES The scope of extinuous cannot by this confidence is defined below

MANUPACTURING, SALLS AND SERVICE OF GENERATOR AND GENERATOR COMPLEMENTS, WATER FUMP, FORKLIFT, UPS, REGULATOR, CONVERTERS, SIGTTER POWER SUPPLIES

Complexer Needer : GCRCERT-11.2023.3585 Complexer Jour Date (#1.11.2023 Complexer Failed) : 21.38.2024

Alemany games Abimaryu Casaw Approval

Ki gabad Matania anang Ki Kabal Kelang Ki Igaba anang Ali Solah ya Ki Kabalan Ki Kolah ya Ki Kabalan Ki Kabalan ya Ki Kabalan Ki Kabalan ya Ki Kabalan Ki Kabalan ya Ki Kabalan ya Ki GUR CERT



Certificate

HEALTHY & SAFE WORKPLACE CERTIFICATE

JCB ENERGY ELECTRIC POWER INDUSTRY


CALLE DE TRESPADERNE, NUM 7 PLANTA L'PUERTA C 20042 MADRID+ (MADRID), SPAIN that been writted to obtain a Healthy and Safe Workplace Certificate by fulfilling the equiversets for COVO-19 resources, when the physical conditions of the business ch is the scope of the Healthy and Safe Workplace Certificate program.


FACTORIES - PRODUCTION LOCATIONS: ELECTRICAL AND ELECTRONICS INDUSTRY

Conglow Namber 1 GCRCERT-11.2023.3658 Conglow New Day 97.11.2023 Conglow Holdy 105.11.2023



Alemanya Game Azimanyu Caucav Approval

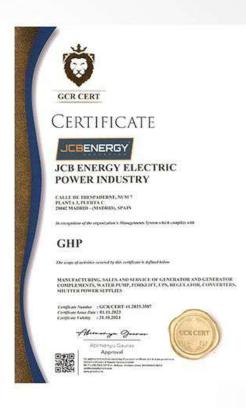

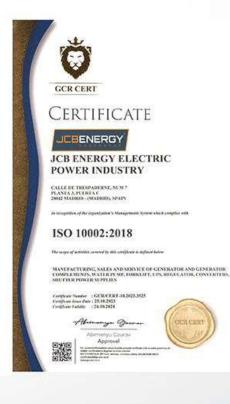



124

S.S.



www.jcbenergy.es