

BEULCO Drinking Water Connection Unit

The BEULCO drinking water connection unit is the one solution for the safe delivery of drinking water – everywhere and tamper-proof. The mobile drinking water supply on construction sites, on fairgrounds, for agriculture purposes or during fairs and events gets a new safety level. The standard model is equipped with one backflow preventer BA DN20 and prepared for the installation of a water meter Qn 2.5 (new: $Q_3 = 4$).



- Tamper-proofed
- Flexible connection by pre-installed GEKA couplings
- Protection of the drinking water system against back pressure, back absorption and backflow of non-potable water up to liquid category 4
- Minimisation of the unknown risks at the transfer point from the supplying conduit
- Completely automatic operation
- Protection of site water connections and fairground supplies, also beyond the outlet height

Also available with 2, 3, 4 or 10 points of withdrawal - ready for use.




Extension module

For fast and safe retrofitting of the drinking water connection unit

Consisting of:

- 1 x backflow preventer BA DN 20 with GEKA coupling
- T-piece with 1" female thread
- Fitting 1"
- Pipe nipple 1" 80
- Seal
- Fastening material

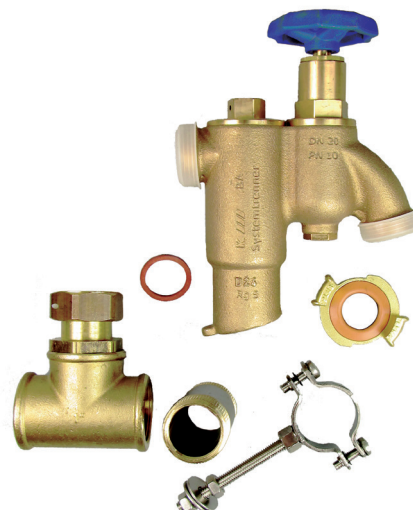

ADD-ON DISTRIBUTOR FOR OVER-GROUND HYDRANTS

Model 4092BA



Item may differ from the picture.

Example: add-on distributor backflow preventer BA DN 40 1-fold without water meter

Example: add-on distributor backflow preventer BA DN 20 3-fold without water meter

Example: add-on distributor backflow preventer BA DN 20 4-fold without water meter

number	backflow preventer BA	connection	D	W	pkg. unit	EAN no. 4027848-
1-fold	1 x DN 20	C-coupling	●	●	1	326082
1-fold	1 x DN 40	C-coupling	●	●	1	326044
1-fold	1 x DN 20	B-coupling	●	●	1	331468
1-fold	1 x DN 40	B-coupling	●	●	1	331475
1-fold (straight)	1 x DN 20	C-coupling	●	●	1	338740
2-fold	2 x DN 20	C-coupling	●	●	1	331642
2-fold	2 x DN 20	B-coupling	●	●	1	331703
2-fold	2 x DN 40	B-coupling	●	●	1	331659
2-fold	1 x DN 20 / 1 x DN 40	C-coupling	●	●	1	331734
2-fold	1 x DN 20 / 1 x DN 40	B-coupling	●	●	1	331741
3-fold	3 x DN 20	C-coupling	●	●	1	326051
3-fold	3 x DN 20	B-coupling	●	●	1	331710
4-fold	4 x DN 20	C-coupling	●	●	1	326068
4-fold	4 x DN 20	B-coupling	●	●	1	331727

DRINKING WATER CONNECTION UNIT

Model 4093BA



equipped with: backflow preventer BA 1-fold DN 20 (extendable up to 10 tapping points) lockable, robust metal board

version 1-4 fold: prepared for water meter Qn 2,5 (before Q₃ = 4) with Geka-coupling at the input side and Quickturn piston valve

Item may differ from the picture.

equipment	D	W	pkg. unit	EAN no. 4027848-
1-fold	●	●	1	364084
2-fold	●	●	1	369133
3-fold	●	●	1	369140
4-fold	●	●	1	369157
10-fold (with C-coupling at the input side)	●	●	1	369584